

# Marlow Series Prime Line<sup>®</sup>

SELF-PRIMING CENTRIFUGAL PUMPS TECHNICAL DATA



### Prime Line® A Full Range of Product Features

Rugged Construction: Cast iron construction in close coupled and frame mounted design.

Superior Priming: High suction inlet and internal suction check valve keeps more liquid in the casing for faster priming and repriming.

Diffuser Priming: The patented diffuser design allows impeller trim, reduces internal wear and eliminates radial loads.

High Efficiency: Enclosed, trimable impellers provide efficiencies from 60-75% for low energy costs.

Dimensional Interchangeability: Four pump groups allow performance to be changed with replaceable impellers and diffusers.

#### NOTE:

The various versions of the Prime Line are identified by product code numbers as explained to the right. Note that not all combinations of impeller and motor are possible.

### Prime Line® Product Line Numbering System

#### Example Product Code

M 2P1 A 2 1 B 2 A 0 B C E

Epoxy Coated

CE label energy efficient

Optional Base (close-coupled)

#### Mechanical Seals

| Code | Rotary  | Stationary | Elastomers |
|------|---------|------------|------------|
| 0    | Carbon  | Ceramic    | BUNA N     |
| 1    | Carbon  | Ceramic    | Viton      |
| 2    | Sil Car | Sil Car    | Viton      |
| 3    | Sil Car | Sil Car    | EPR        |

#### Impeller Options

|   | 2P1  | 2P2  | 2P3  | 2P4  | 3P1  | 3P2  | 3P3  | 3P4  | 4P1   | 4P2  | 4E1  | 6E1  | 6E2  |
|---|------|------|------|------|------|------|------|------|-------|------|------|------|------|
| A | 6.88 | 4.88 | 5.69 | 6.88 | 8.75 | 5.88 | 8.06 | 7    | 10.63 | 9    | 12   | 11.5 | 12.5 |
| B | 6.5  | 4.63 | 5.44 | 6.63 | 8.5  | 5.5  | 7.69 | 6.75 | 10.38 | 8.75 | 11.5 | 11   | 12   |
| C | 6.13 | 4.38 | 5.19 | 6.38 | 8.25 | 5.13 | 7.31 | 6.5  | 10.13 | 8.5  | 11   | 10.5 | 11.5 |
| D | -    | 4.13 | 4.94 | 6.13 | 8    | 4.75 | 6.94 | 6.25 | 9.88  | 8.25 | 10.5 | 10   | 11   |
| E | -    | -    | -    | 5.75 | 7.75 | -    | -    | 6    | -     | -    | 10   | 9.5  | -    |

#### Driver\*

|                      |                       |                     |
|----------------------|-----------------------|---------------------|
| 1 = 1 PH, ODP        | 8 = 575 V, Exp. Proof | E = 3 PH, XP PE     |
| 2 = 3 PH, ODP        | 9 = 1 PH, TEFC        | F = 3 PH, 575 XP PE |
| 3 = 575 V, ODP       | A = 3 PH, ODP PE      | G = 3 PH, WD PE     |
| 5 = 3 PH, TEFC       | B = 3 PH, 575 ODP PE  | H = 1 PH, ODP PE    |
| 6 = 575 V, TEFC      | C = 3 PH, TE PE       | I = 1 PH, TEFC PE   |
| 7 = 3 PH, Exp. Proof | D = 3 PH, 575 TE PE   |                     |

Not used for frame mounted units, use FRM.

#### Horsepower Rating\*

|           |           |
|-----------|-----------|
| A = 1½ HP | G = 15 HP |
| B = 2 HP  | H = 20 HP |
| C = 3 HP  | J = 25 HP |
| D = 5 HP  | K = 30 HP |
| E = 7½ HP | M = 40 HP |
| F = 10 HP | N = 50 HP |

FRS for frame mount with 316SS shaft.

#### Driver: Hertz/RPM\*

|                     |                     |
|---------------------|---------------------|
| 1 = 60 Hz, 3500 RPM | 4 = 50 Hz, 2850 RPM |
| 2 = 60 Hz, 1750 RPM | 5 = 50 Hz, 1450 RPM |
| 3 = 60 Hz, 1150 RPM |                     |

#### Shaft Sleeve

0 = No Sleeve (E-Series only)  
2 = 316 Stainless Steel

#### Impeller Material \*\*

A = Iron  
S = Stainless Steel (4E1, 6E1)

#### Pump Size


|                |                            |
|----------------|----------------------------|
| 2P1 = 2 x 2-6⅞ | 4P1 = 4 x 4-10⅝            |
| 2P2 = 2 x 2-4⅞ | 4P2 = 4 x 4-9              |
| 2P3 = 2 x 2-5⅞ | <b>Frame Mounted only:</b> |
| 2P4 = 2 x 2-6  | 4E1 = 4 x 4-12             |
| 3P1 = 3 x 3-8⅞ | 6E1 = 6 x 6-11½            |
| 3P2 = 3 x 3-5⅞ | 6E2 = 6 x 6-12½            |
| 3P3 = 3 x 3-8⅞ |                            |
| 3P4 = 3 x 3-7  |                            |

#### Marlow Series


\* Substitute "FRM" for frame mounted with carbon steel shaft or "FRS" for frame mounted with 316SS shaft (316SS shaft available on frame mounted only).

\*\* Recommended use of "FRS" frame with stainless steel impeller.


### Prime Line® Performance Coverage (60 Hz) 2P - 4P

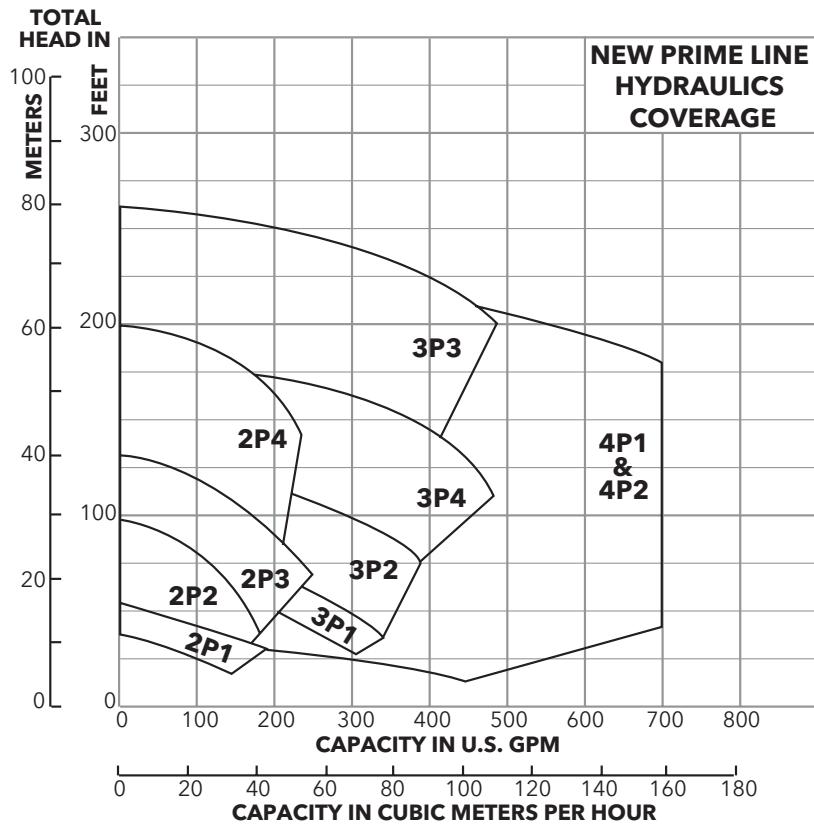

### Prime Line® Key Features

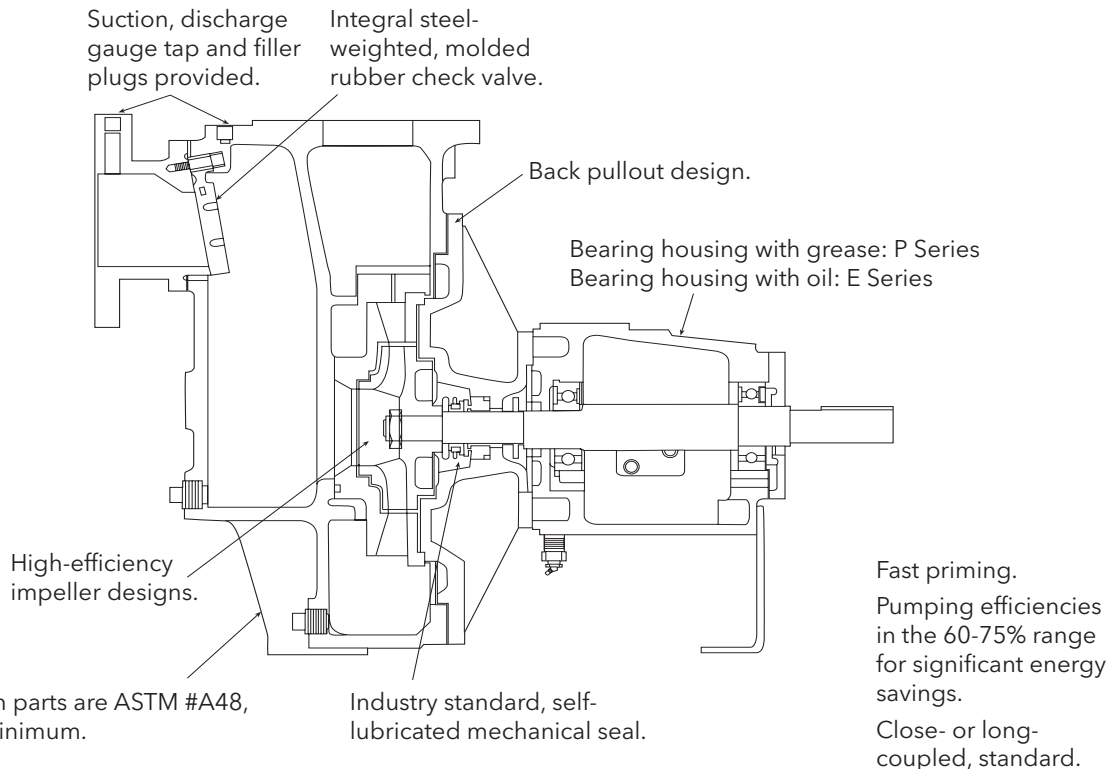

### Prime Line® 2P - 4P Close-Coupled Pumps – Materials of Construction

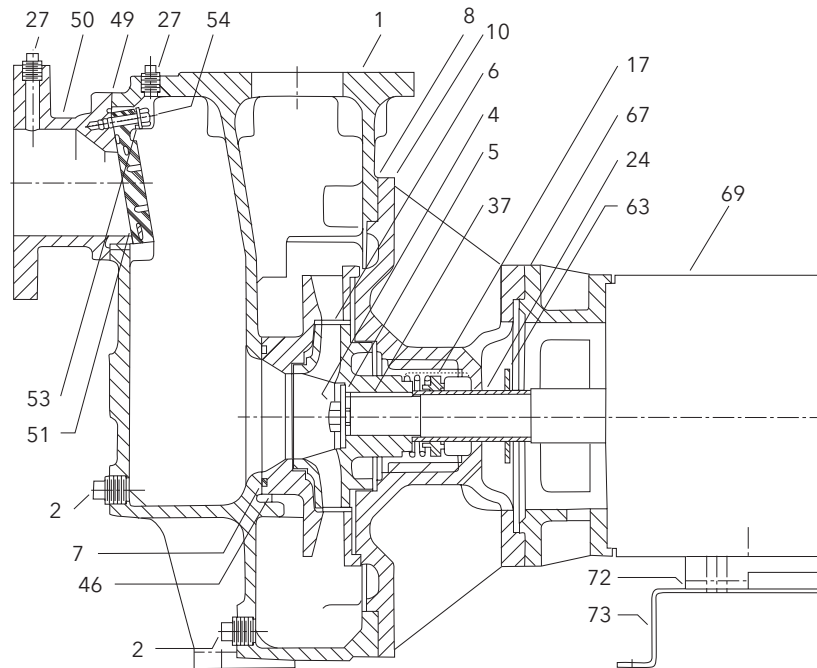


| Item No.        | Description            | Materials       |
|-----------------|------------------------|-----------------|
| 1               | Casing                 | Cast Iron       |
| 2               | Pipe Plug              | Steel           |
| 4               | Bolt, Impeller         | Stainless Steel |
| 5               | Washer, Impeller       | Stainless Steel |
| 6               | Closed Impeller        | Cast Iron       |
| 7 <sup>①</sup>  | O-Ring                 | BUNA-N          |
| 8               | Diecut Gasket          | Lexide          |
| 10              | Seal Housing           | Cast Iron       |
| 17 <sup>①</sup> | Single Mechanical Seal | Miscellaneous   |
| 24              | Shaft Sleeve           | Stainelss Steel |
| 27              | Pipe Plug              | Steel           |
| 37              | Impeller Key           | Steel           |

| Item No.        | Description     | Materials       |
|-----------------|-----------------|-----------------|
| 46              | Diffuser        | Cast Iron       |
| 49              | Diecut Gasket   | Lexide          |
| 50              | Suction Inlet   | Cast Iron       |
| 51 <sup>①</sup> | Check Valve     | BUNA-N          |
| 53              | Keeper          | Stainless Steel |
| 54              | Bolt, Shoulder  | Stainless Steel |
| 63              | Slinger         | Rubber          |
| 67              | Motor Adapter   | Cast Iron       |
| 69              | Motor (specify) | –               |
| 72              | Shim            | Steel           |
| 73              | Riser           | Steel           |

① Item Nos. 7, 17 and 51 are available in Viton® as an optional material.

### Prime Line® 2P - 4P Frame Mounted Pumps Materials of Construction

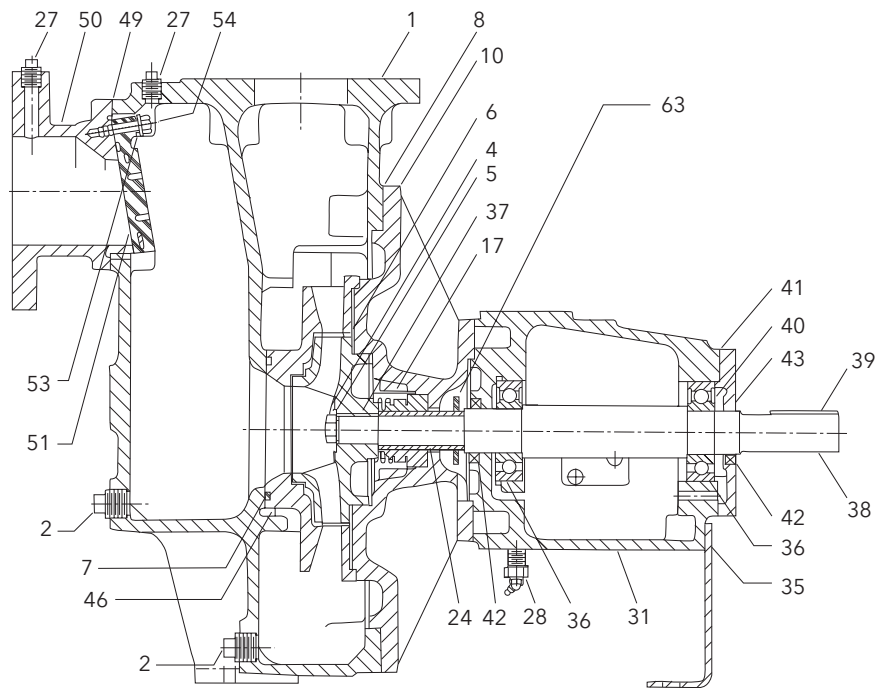


| Item No.        | Description            | Materials       |
|-----------------|------------------------|-----------------|
| 1               | Casing                 | Cast Iron       |
| 2               | Pipe Plug              | Steel           |
| 4               | Bolt, Impeller         | Stainless Steel |
| 5               | Washer, Impeller       | Stainless Steel |
| 6               | Closed Impeller        | Cast Iron       |
| 7 <sup>①</sup>  | O-Ring                 | BUNA-N          |
| 8               | Diecut Gasket          | Lexide          |
| 10              | Seal Housing           | Cast Iron       |
| 17 <sup>①</sup> | Single Mechanical Seal | Miscellaneous   |
| 24              | Shaft Sleeve           | Stainless Steel |
| 28              | Grease Fitting         | Steel           |
| 31              | Bearing Housing        | Cast Iron       |
| 35              | Mounting Foot          | Steel           |
| 36              | Bearing                | Steel           |

| Item No.        | Description      | Materials       |
|-----------------|------------------|-----------------|
| 37              | Impeller Key     | Steel           |
| 38              | Shaft            | Steel           |
| 39              | Coupling Key     | Steel           |
| 40              | Bearing Retainer | Steel           |
| 41              | Diecut Gasket    | Steel           |
| 42              | Lip Seal         | BUNA/Steel      |
| 43              | Bearing Cap      | Cast Iron       |
| 46              | Diffuser         | Cast Iron       |
| 49              | Diecut Gasket    | Lexide          |
| 50              | Inlet Suction    | Cast Iron       |
| 51 <sup>①</sup> | Check Valve      | BUNA-N          |
| 53              | Keeper           | Stainless Steel |
| 54              | Bolt, Shoulder   | Stainless Steel |
| 63              | Slinger          | Rubber          |

<sup>①</sup> Item Nos. 7, 17 and 51 are available in Viton as an optional material.

### Prime Line® 4E and 6E Pumps – Materials of Construction

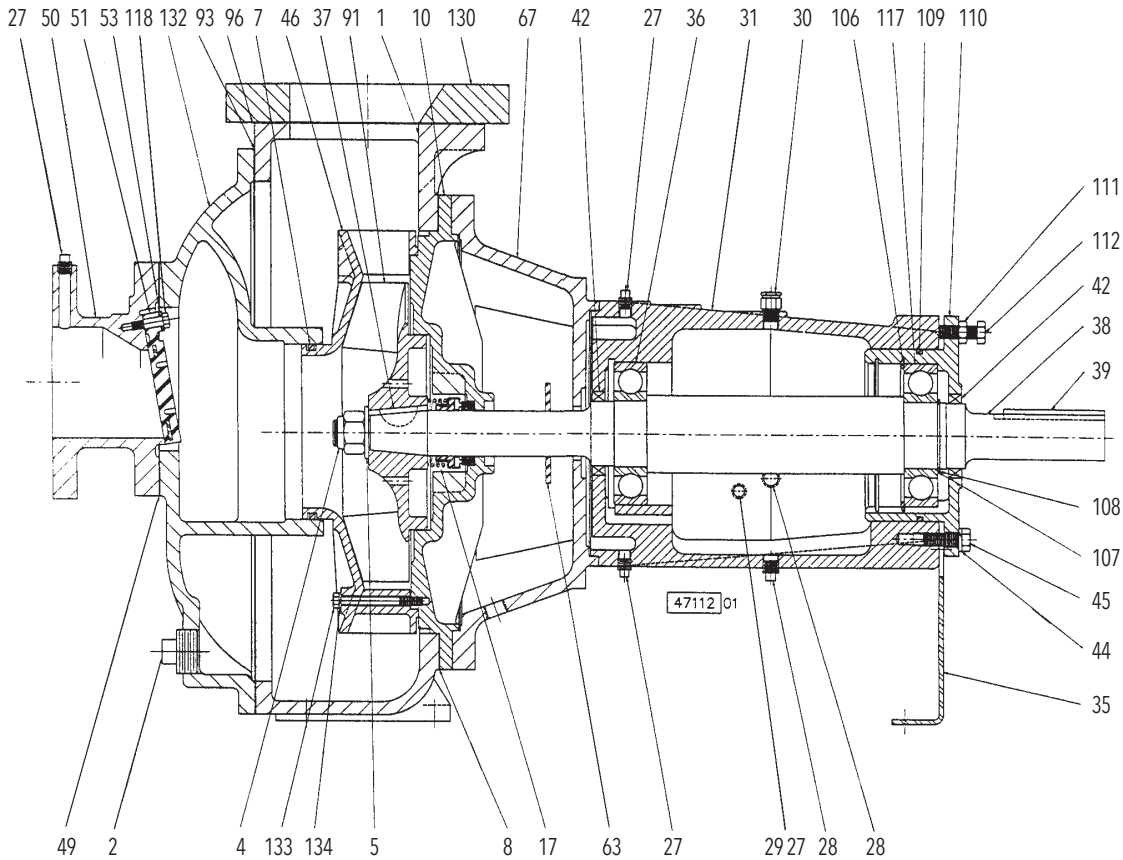


| Item No. | Description             | Materials          |
|----------|-------------------------|--------------------|
| 1        | Casing                  | Ductile Iron       |
| 2        | Pipe Plug               | Cast Iron          |
| 4        | Locknut, Impeller       | Steel              |
| 5        | Washer, Curved          | Stainless Steel    |
| 7*       | O-Ring                  | Buna-N Rubber      |
| 8        | Gasket, Diecut          | Composite          |
| 10       | Housing Seal            | Cast Iron          |
| 17*      | Seal, Single Mechanical | Carbon vs. Ceramic |
| 27       | Pipe Plug               | Steel              |
| 28       | Pipe Plug               | Steel              |
| 29       | Oiler (optional)        | –                  |
| 30       | Vent, Filter            | Steel              |
| 31       | Housing, Bearing        | Cast Iron          |
| 35       | Foot, Mounting          | Steel              |
| 36       | Bearing                 | #313               |
| 37       | Key, Impeller           | Steel              |
| 38       | Shaft                   | Steel              |
| 39       | Key, Coupling           | Steel              |
| 42       | Retainer                | Steel/Rubber       |
| 44       | Lockwasher              | Stainless Steel    |
| 45       | Capscrew                | Stainless Steel    |


| Item No. | Description      | Materials       |
|----------|------------------|-----------------|
| 46       | Diffuser         | Cast Iron       |
| 49       | Gasket, Diecut   | Composite       |
| 50       | Inlet, Suction   | Cast Iron       |
| 51*      | Valve, Check     | Buna-N Rubber   |
| 53       | Keeper           | Stainless Steel |
| 63       | Slinger          | PVC             |
| 67       | Bracket          | Cast Iron       |
| 91       | Impeller         | Cast Iron       |
| 93       | Gasket, Diecut   | Composite       |
| 96       | Gasket, Diecut   | Composite       |
| 106      | Ring, Retaining  | Steel           |
| 107      | Shim, Bearing    | Steel           |
| 108      | Ring, Retaining  | Steel           |
| 109      | O-Ring           | Buna-N Rubber   |
| 110      | Carrier, Bearing | Cast Iron       |
| 111      | Hexnut, Jam      | Stainless Steel |
| 118      | Bolt, Shouldered | Stainless Steel |
| 130      | Adapter, Plate   | Cast Iron       |
| 132      | Cover, Casing    | Cast Iron       |
| 133      | Capscrew         | Stainless Steel |
| 134      | Lockwasher       | Stainless Steel |

\*Available in Viton® as an option.

## Prime Line® Performance Coverage (60 Hz) 4E and 6E

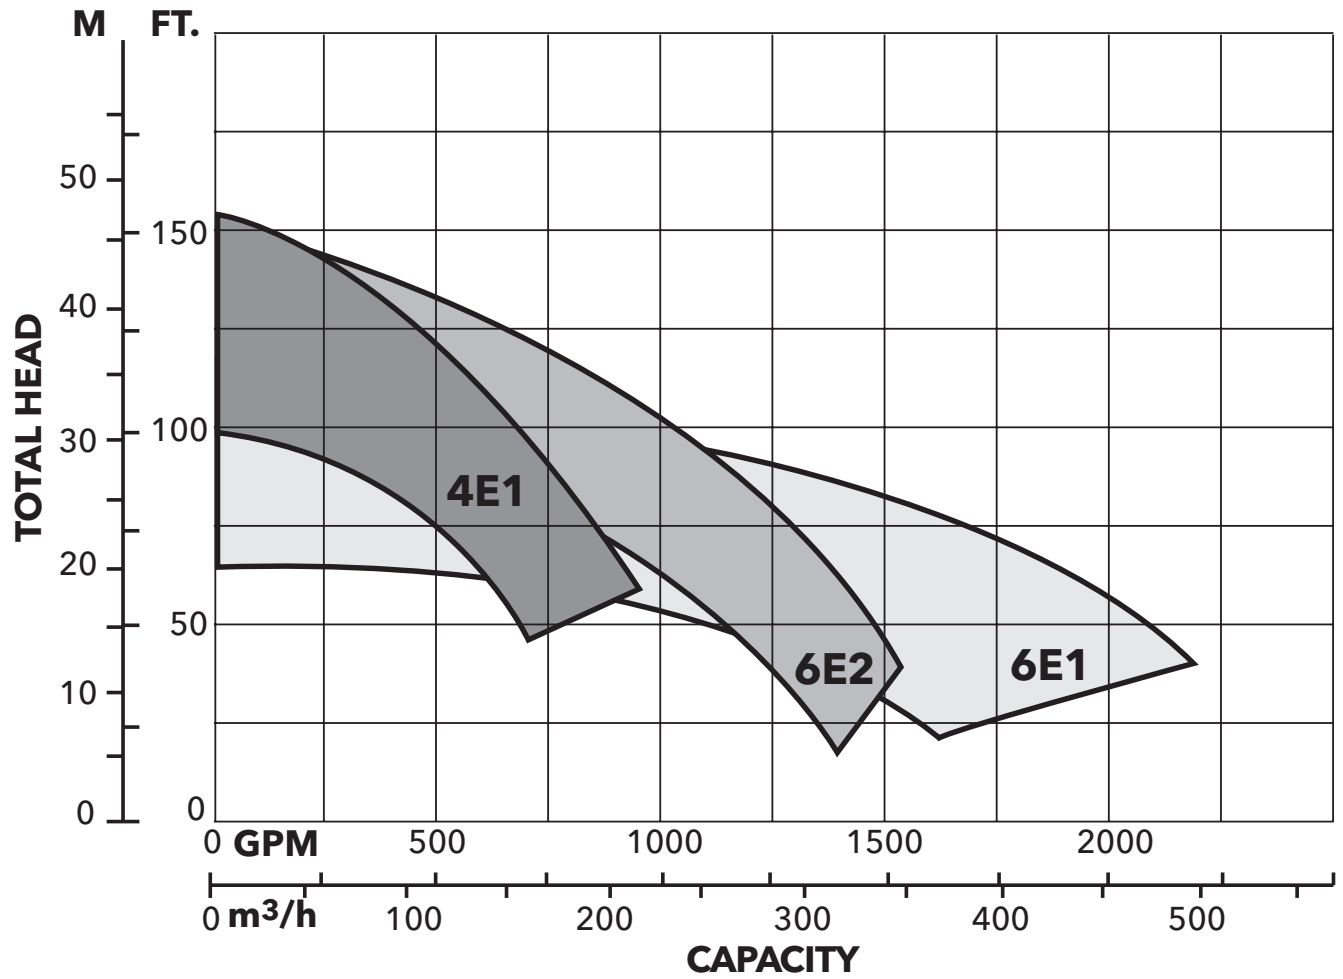

### Prime Line® Performance Curves - Size 2P1, 60 Hz

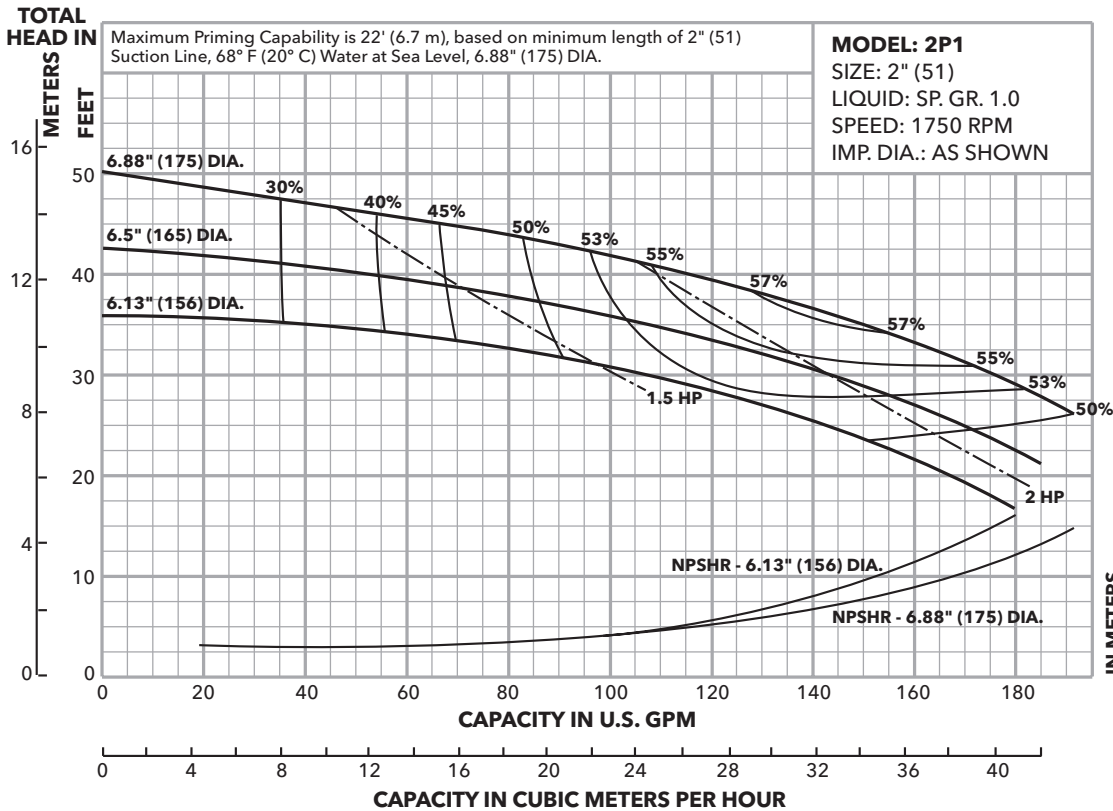


| Ordering Code | Standard HP Rating | Imp. Dia. ① |
|---------------|--------------------|-------------|
| A             | 3                  | 6.88 (175)  |
| B             | 2                  | 6.5 (165)   |
| C             | 1½*                | 6.13 (156)  |

\* Requires service factor.

① Impeller diameter in inches and millimeters (mm).

### Prime Line® Performance Curves - Size 2P1, 50 Hz

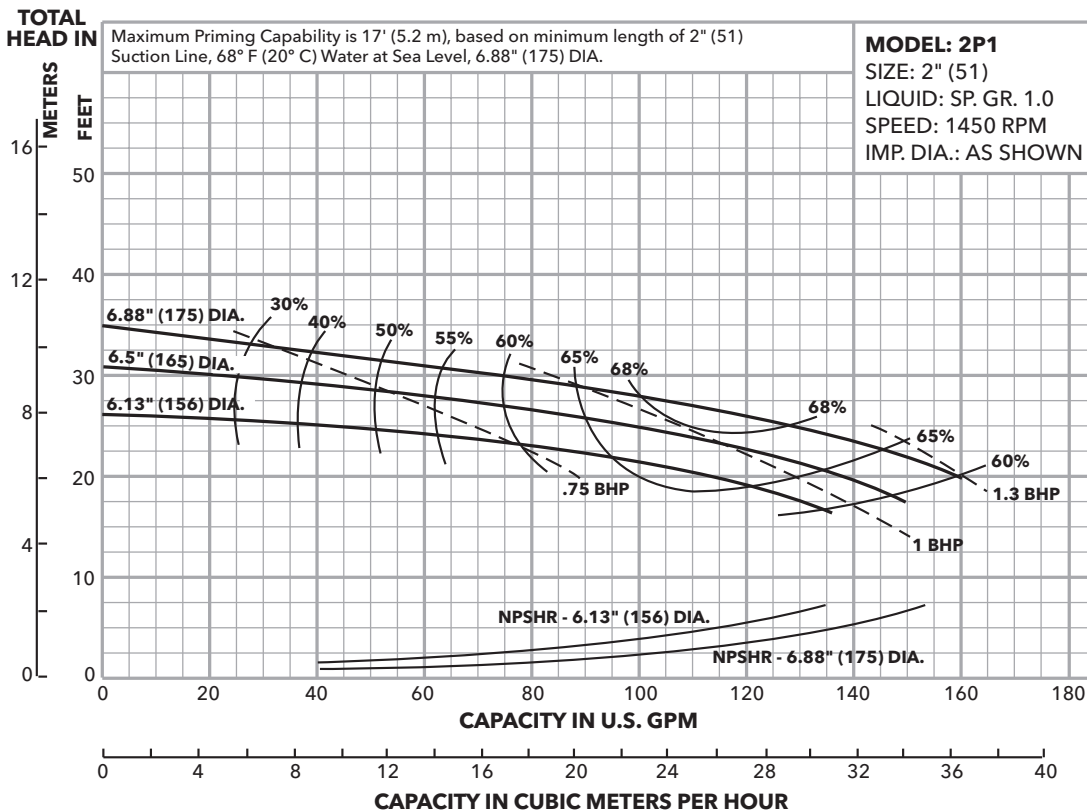


| Ordering Code | Standard HP Rating | Imp. Dia. ① |
|---------------|--------------------|-------------|
| A             | 1½                 | 6.88 (175)  |
| B             | 1½                 | 6.5 (165)   |
| C             | 1                  | 6.13 (156)  |

① Impeller diameter in inches and millimeters (mm).




### Prime Line® Performance Curves - Size 2P2, 60 Hz

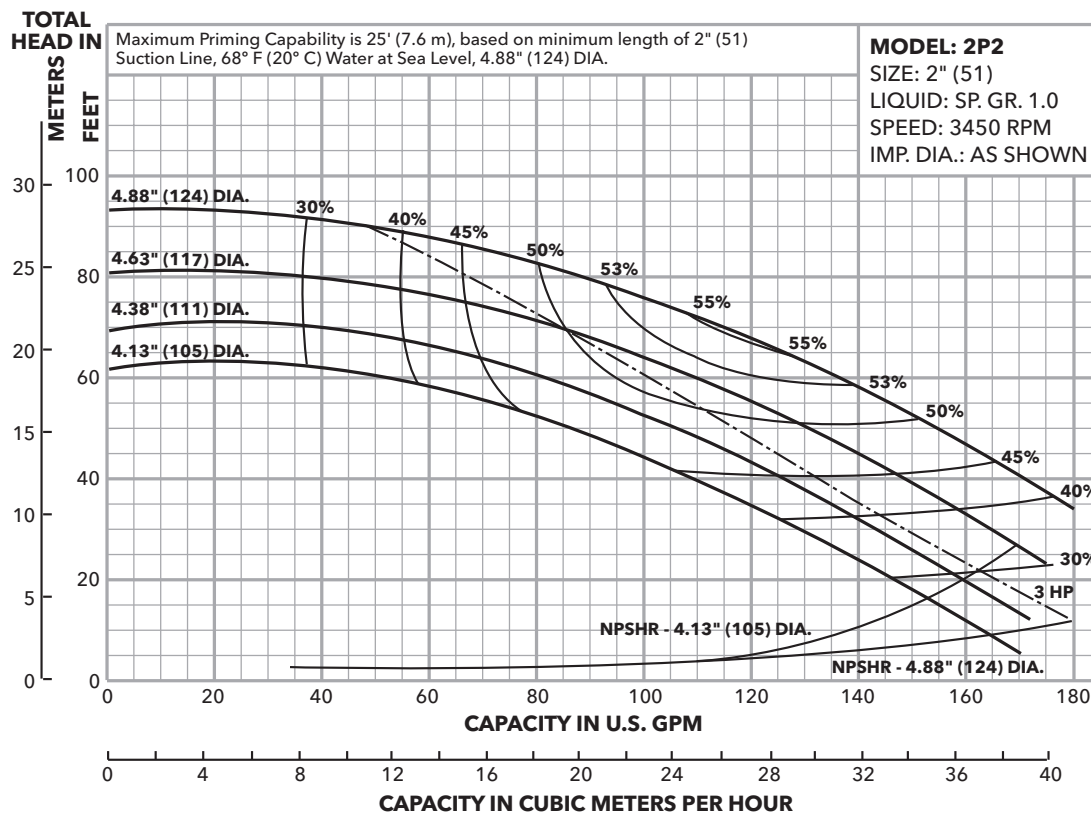


| Ordering Code | Standard HP Rating | Imp. Dia. ① |
|---------------|--------------------|-------------|
| A             | 5                  | 4.88 (124)  |
| B             | 3*                 | 4.63 (117)  |
| C             | 3                  | 4.38 (111)  |
| D             | 2*                 | 4.13 (105)  |

\* Requires service factor.

① Impeller diameter in inches and millimeters (mm).




### Prime Line® Performance Curves - Size 2P2, 50 Hz

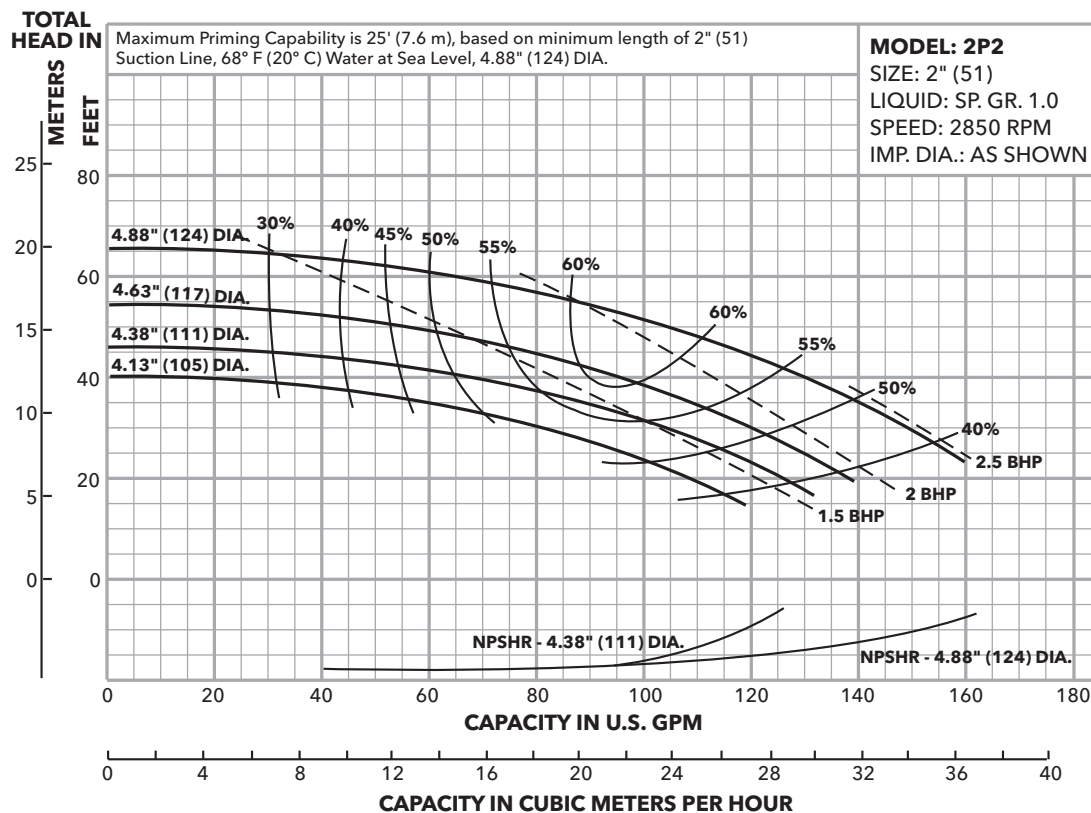


| Ordering Code | Standard HP Rating | Imp. Dia. ① |
|---------------|--------------------|-------------|
| A             | 3                  | 4.88 (124)  |
| B             | 2                  | 4.63 (117)  |
| C             | 1½*                | 4.38 (111)  |
| D             | 1½                 | 4.13 (105)  |

\* Requires service factor.

① Impeller diameter in inches and millimeters (mm).




### Prime Line® Performance Curves - Size 2P3, 60 Hz

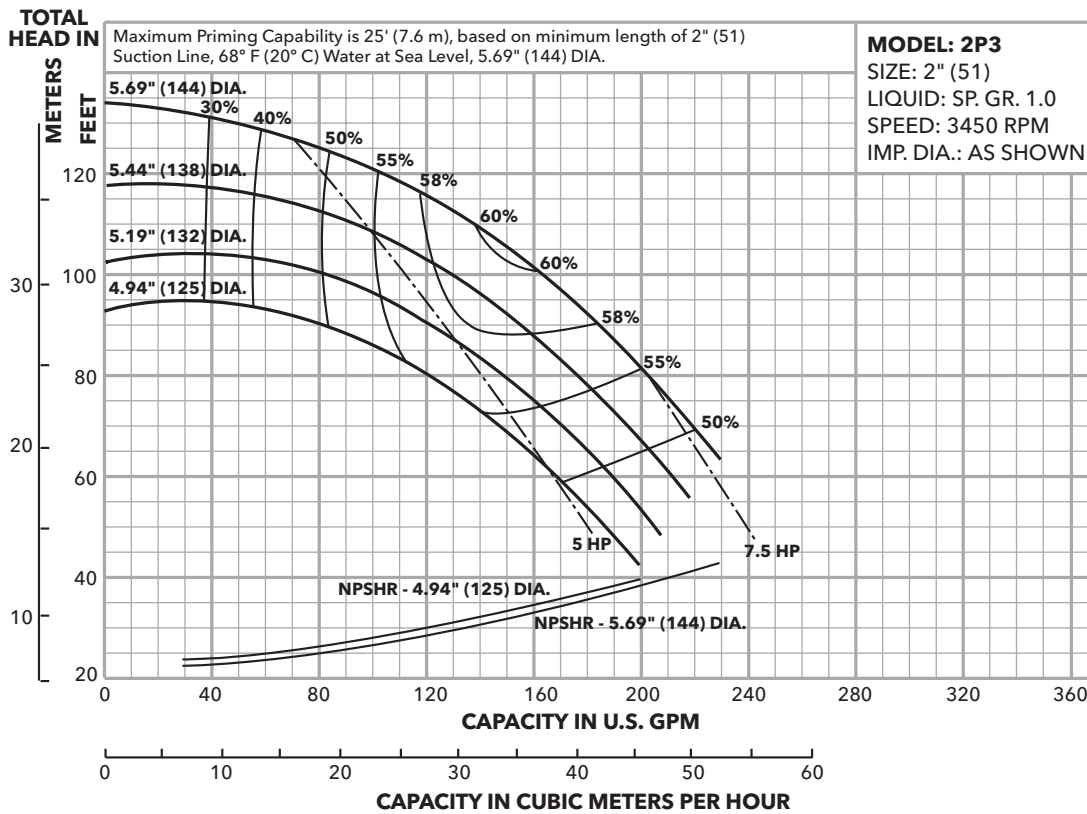

| Ordering Code | Standard HP Rating | Imp. Dia. ① |
|---------------|--------------------|-------------|
| A             | 7½                 | 5.69 (144)  |
| B             | 7½                 | 5.44 (138)  |
| C             | 5*                 | 5.19 (132)  |
| D             | 5                  | 4.94 (125)  |

\* Requires service factor.  
 ① Impeller diameter in inches and millimeters (mm).

### Prime Line® Performance Curves - Size 2P3, 50 Hz

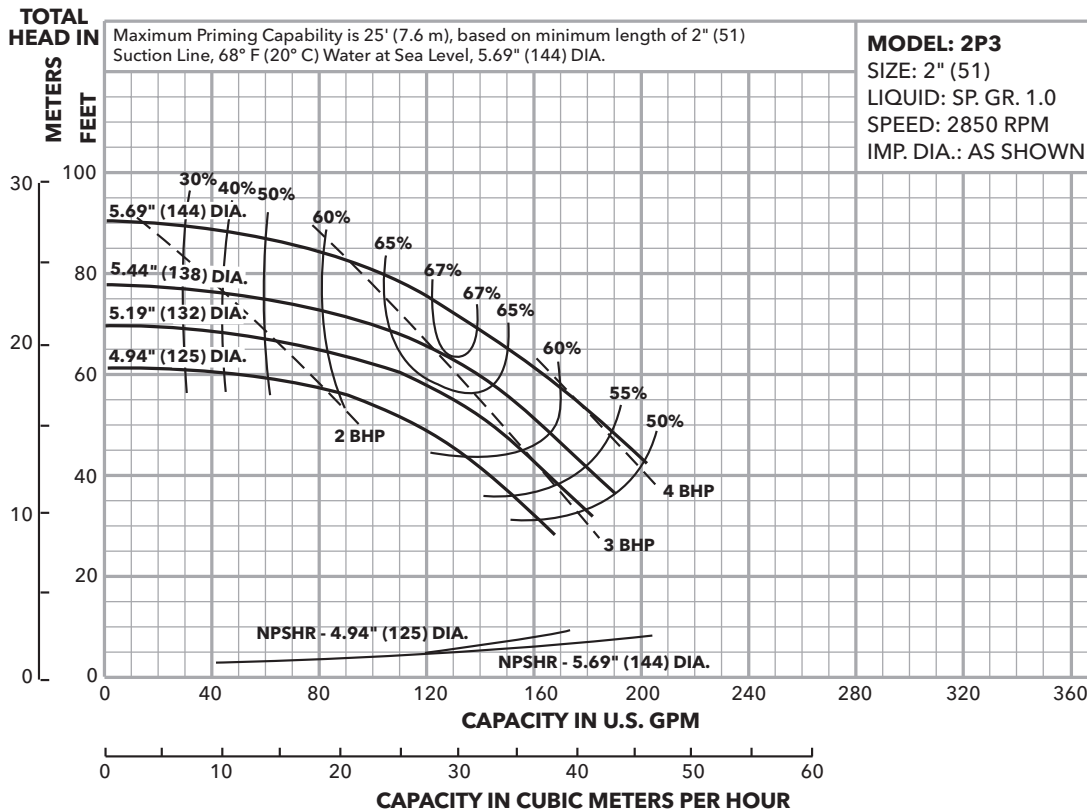


| Ordering Code | Standard HP Rating | Imp. Dia. ① |
|---------------|--------------------|-------------|
| A             | 5                  | 5.69 (144)  |
| B             | 5                  | 5.44 (138)  |
| C             | 3*                 | 5.19 (132)  |
| D             | 3                  | 4.94 (125)  |

\* Requires service factor.  
 ① Impeller diameter in inches and millimeters (mm).

## Commercial Water


### Prime Line® Performance Curves - Size 2P4, 60 Hz

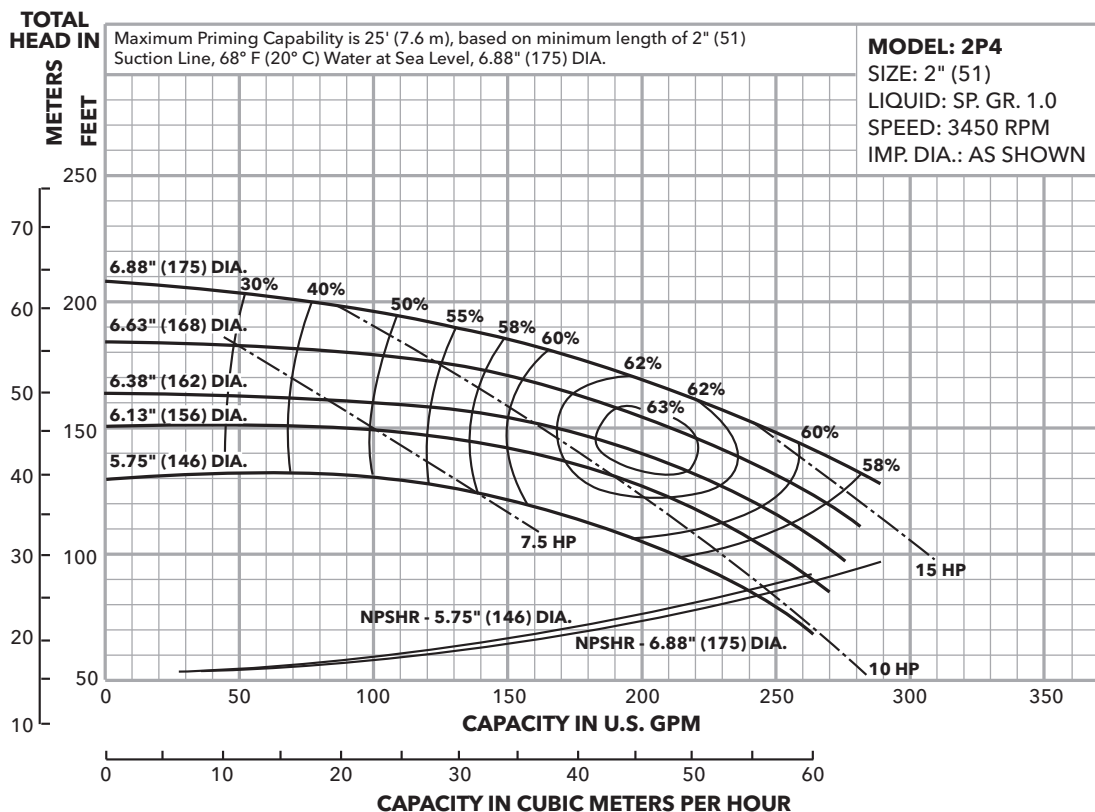


| Ordering Code | Standard HP Rating | Imp. Dia. ① |
|---------------|--------------------|-------------|
| A             | 15                 | 6.88 (175)  |
| B             | 15                 | 6.63 (168)  |
| C             | 10*                | 6.38 (162)  |
| D             | 10                 | 6.13 (156)  |
| E             | 7½*                | 5.75 (146)  |

\* Requires service factor.

① Impeller diameter in inches and millimeters (mm).




### Prime Line® Performance Curves - Size 2P4, 50 Hz

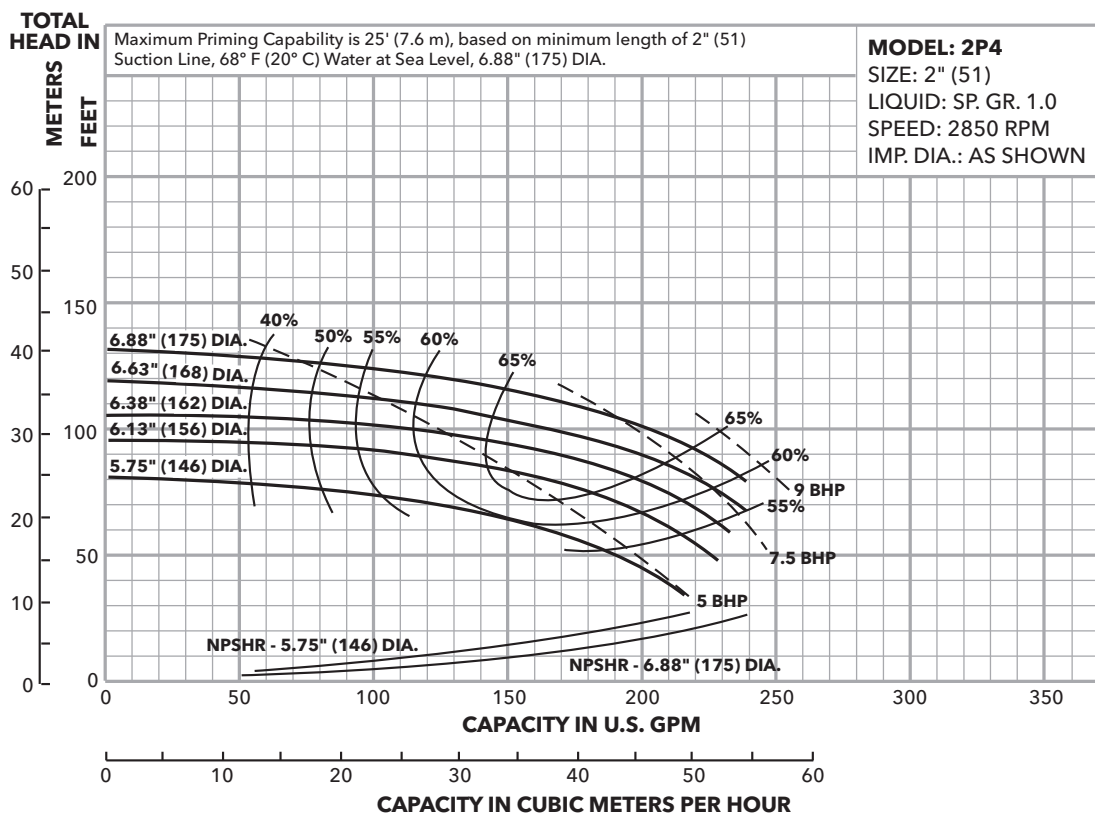


| Ordering Code | Standard HP Rating | Imp. Dia. ① |
|---------------|--------------------|-------------|
| A             | 10                 | 6.88 (175)  |
| B             | 7½*                | 6.63 (168)  |
| C             | 7½                 | 6.38 (162)  |
| D             | 7½                 | 6.13 (156)  |
| E             | 5                  | 5.75 (146)  |

\* Requires service factor.


① Impeller diameter in inches and millimeters (mm).




### Prime Line® Performance Curves - Size 3P1, 60 Hz

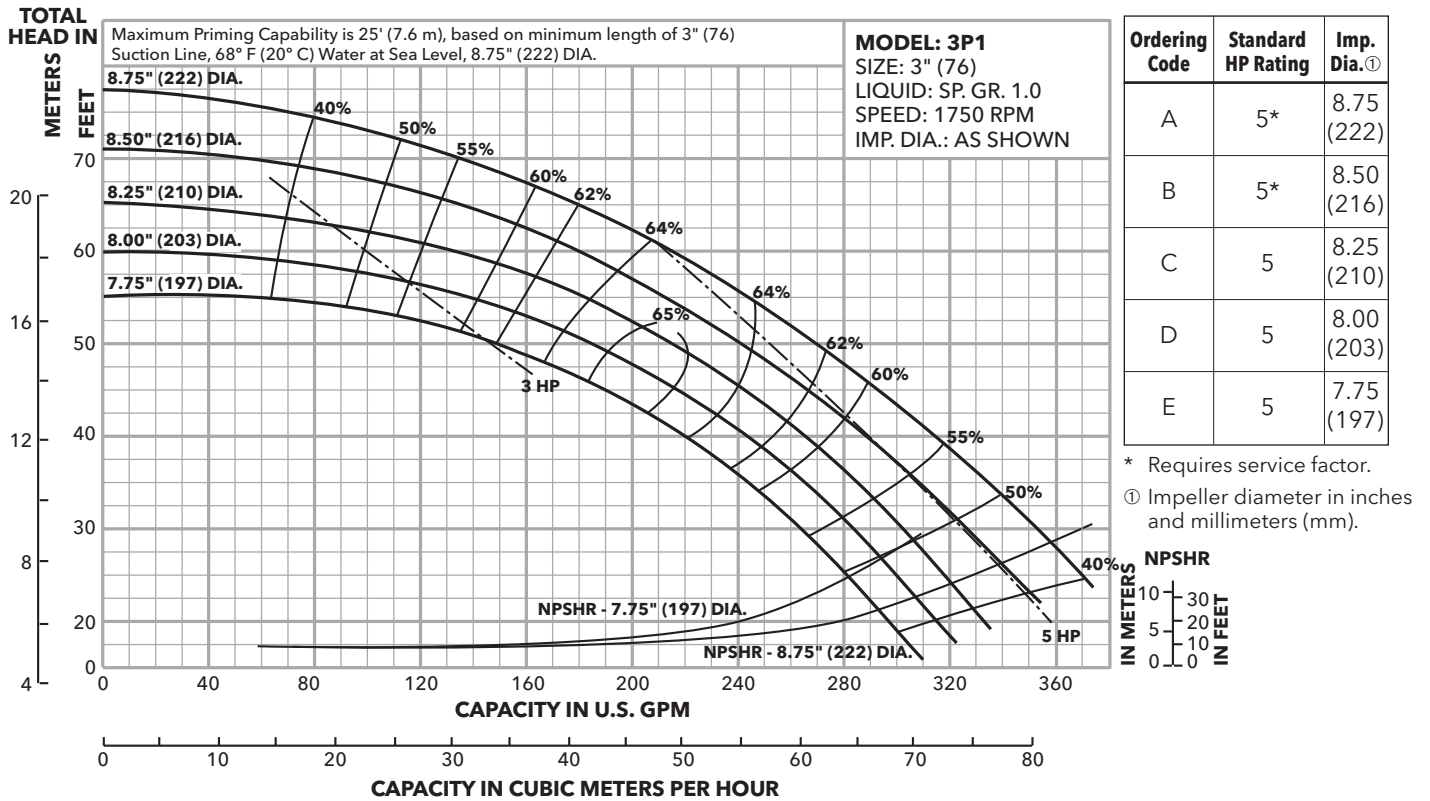

### Prime Line® Performance Curves - Size 3P1, 50 Hz

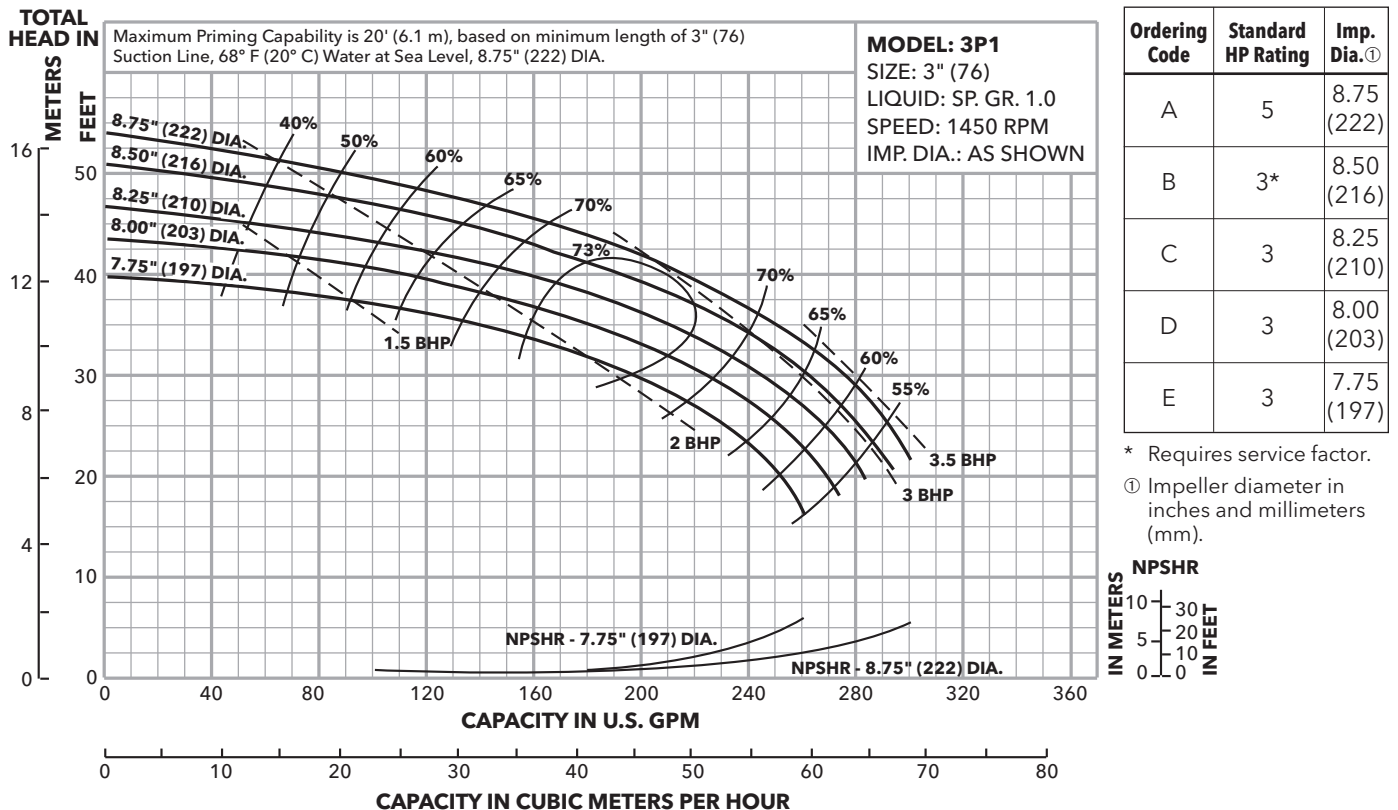


### Prime Line® Performance Curves - Size 3P2, 60 Hz

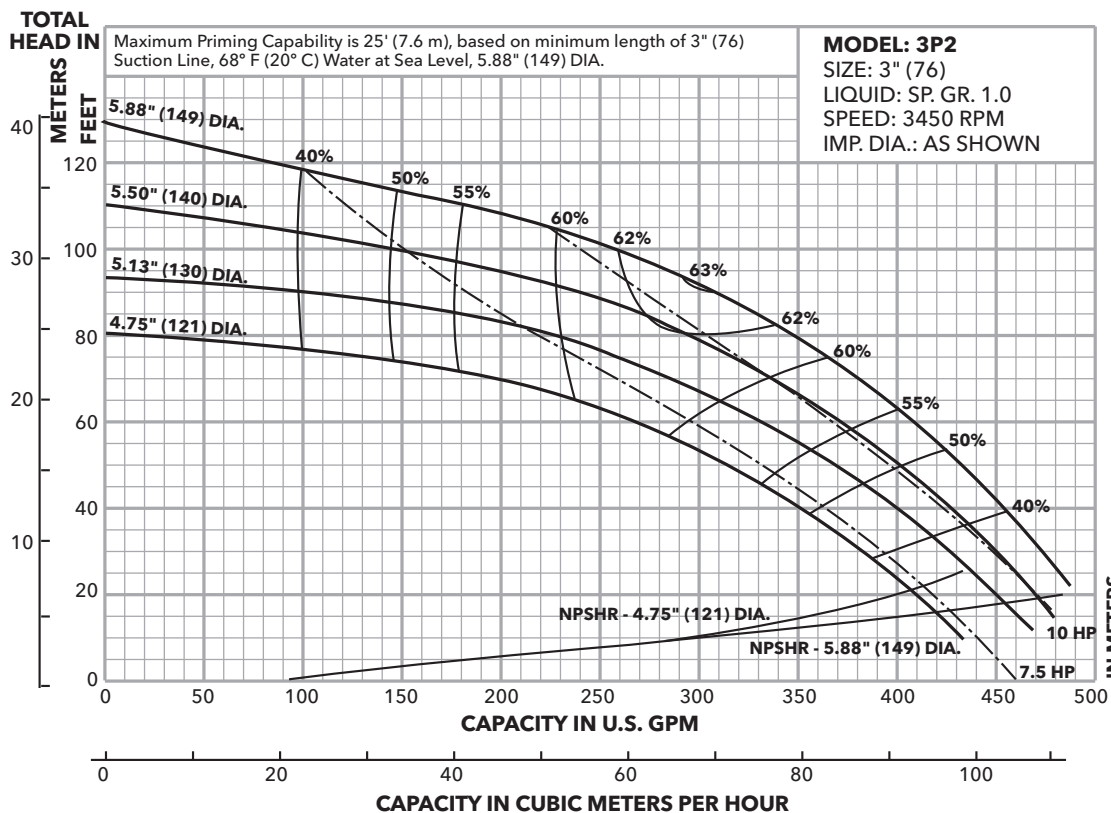

| Ordering Code | Standard HP Rating | Imp. Dia. ① |
|---------------|--------------------|-------------|
| A             | 10*                | 5.88 (149)  |
| B             | 10                 | 5.50 (140)  |
| C             | 7½                 | 5.13 (130)  |
| D             | 5*                 | 4.75 (121)  |

\* Requires service factor.  
 ① Impeller diameter in inches and millimeters (mm).


### Prime Line® Performance Curves - Size 3P2, 50 Hz

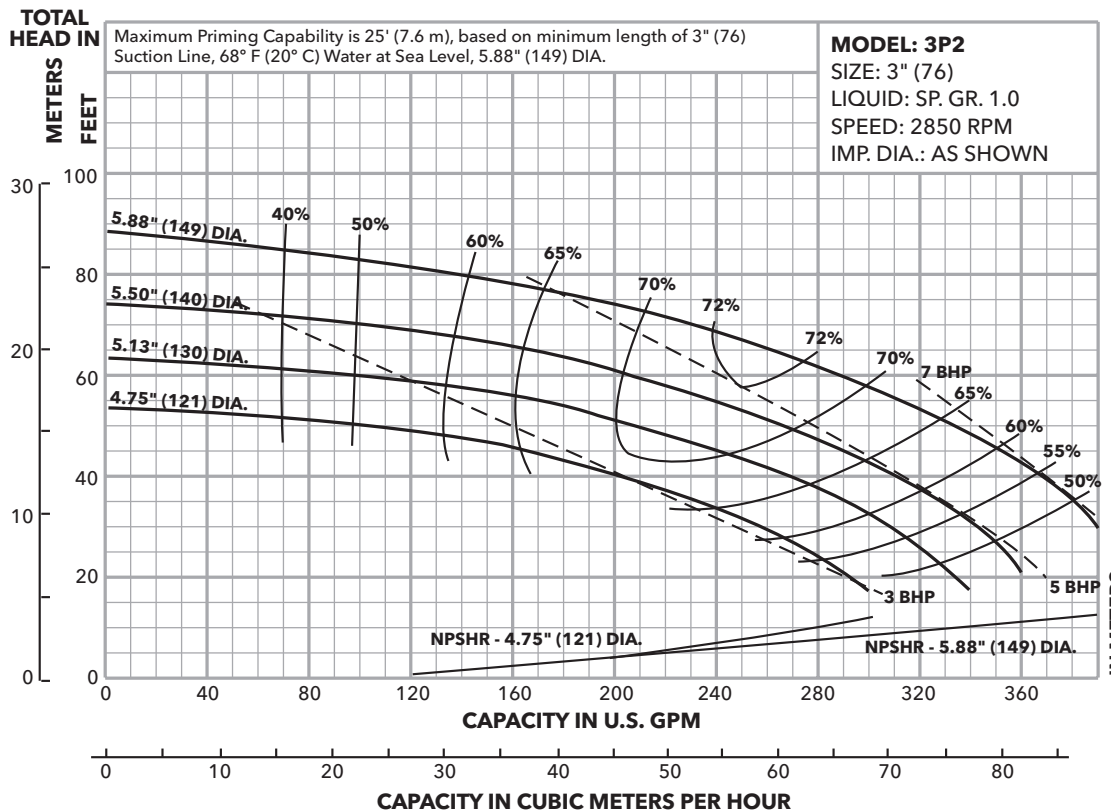

| Ordering Code | Standard HP Rating | Imp. Dia. ① |
|---------------|--------------------|-------------|
| A             | 7½                 | 5.88 (149)  |
| B             | 5                  | 5.50 (140)  |
| C             | 5                  | 5.13 (130)  |
| D             | 3*                 | 4.75 (121)  |

\* Requires service factor.  
 ① Impeller diameter in inches and millimeters (mm).


### Prime Line® Performance Curves - Size 3P3, 60 Hz, 3500 RPM

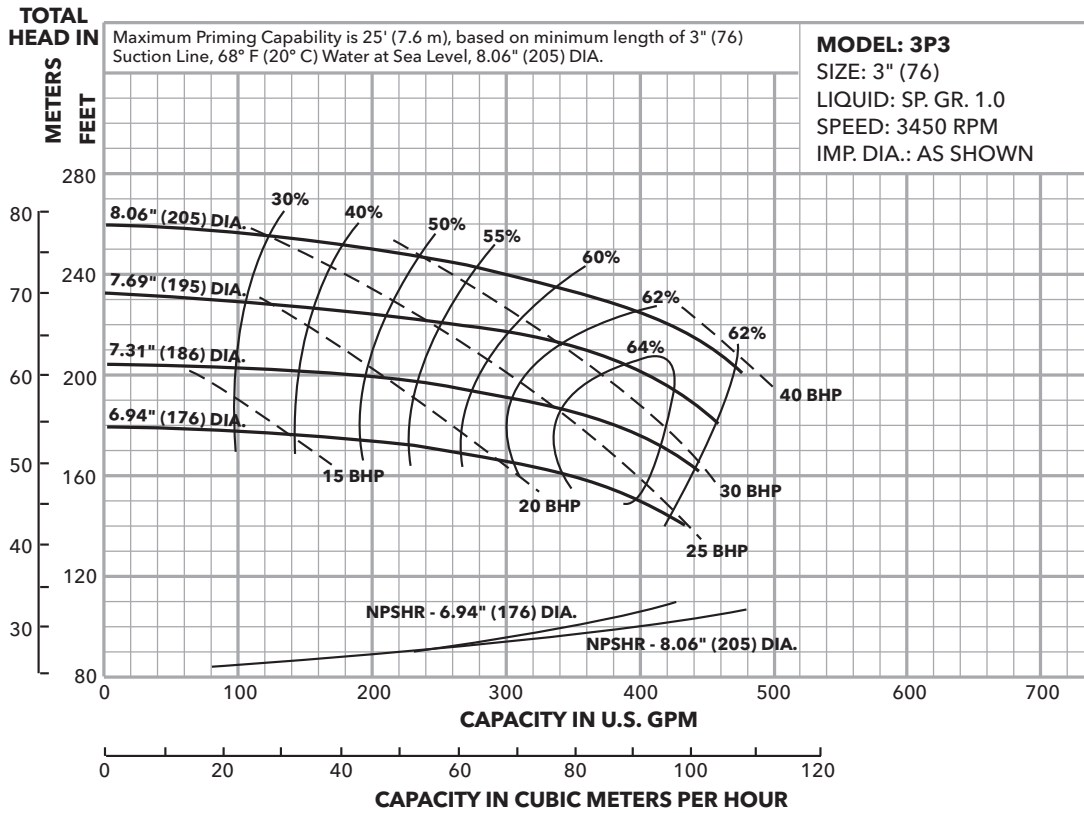

| Ordering Code | Standard HP Rating | Imp. Dia.① |
|---------------|--------------------|------------|
| A             | 40                 | 8.06 (205) |
| B             | 40                 | 7.69 (195) |
| C             | 30                 | 7.31 (186) |
| D             | 25                 | 6.94 (176) |

① Impeller diameter in inches and millimeters (mm).

### Prime Line® Performance Curves - Size 3P3, 50 Hz

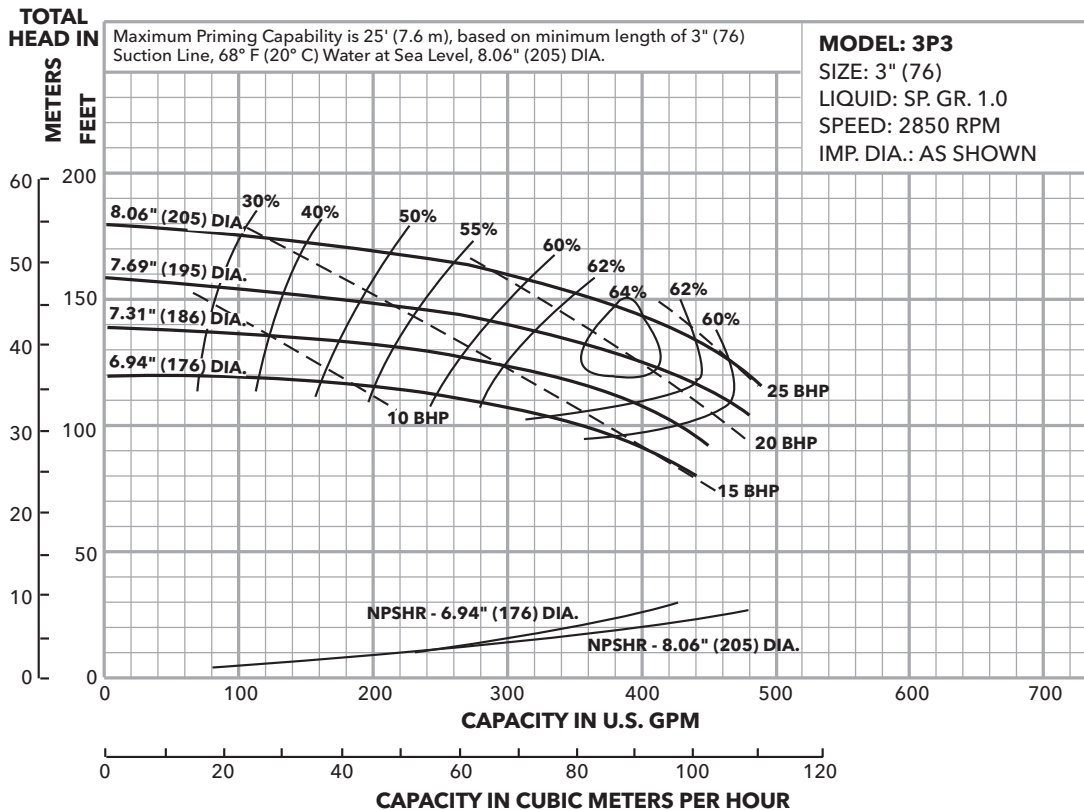


| Ordering Code | Standard HP Rating | Imp. Dia.① |
|---------------|--------------------|------------|
| A             | 25                 | 8.06 (205) |
| B             | 25                 | 7.69 (195) |
| C             | 20                 | 7.31 (186) |
| D             | 15                 | 6.94 (176) |

① Impeller diameter in inches and millimeters (mm).




### Prime Line® Performance Curves - Size 3P3, 60 Hz, 1750 RPM

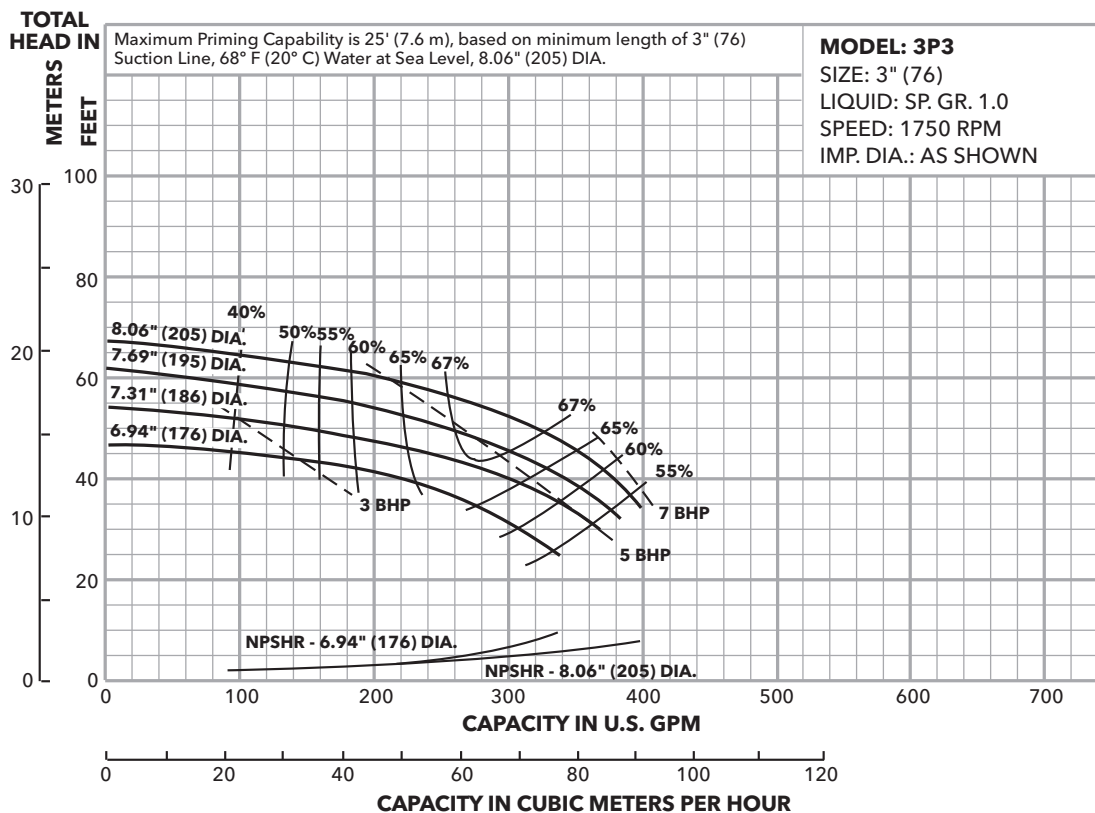

| Ordering Code | Standard HP Rating | Imp. Dia. ① |
|---------------|--------------------|-------------|
| A             | 7½                 | 8.06 (205)  |
| B             | 7½                 | 7.69 (195)  |
| C             | 5                  | 7.31 (186)  |
| D             | 5                  | 6.94 (176)  |

① Impeller diameter in inches and millimeters (mm).


### Prime Line® Performance Curves - Size 3P4, 60 Hz, 3450 RPM

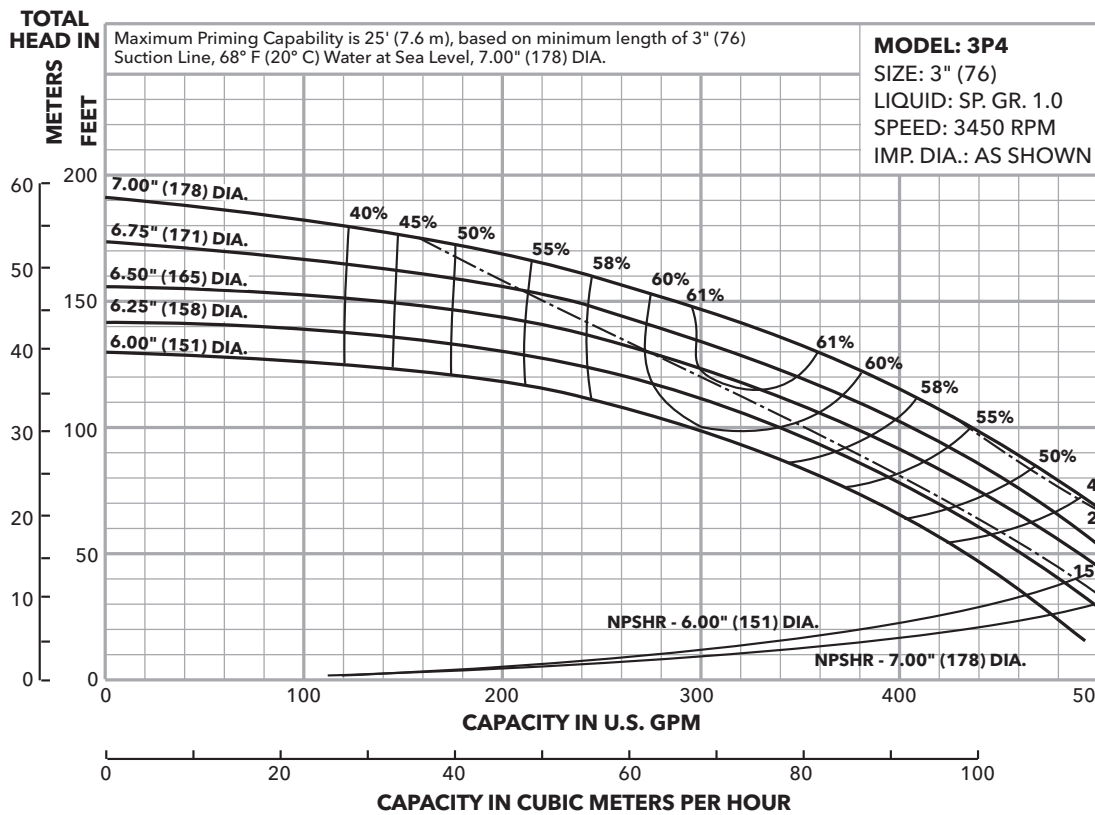

| Ordering Code | Standard HP Rating | Imp. Dia. ① |
|---------------|--------------------|-------------|
| A             | 25                 | 7.00 (178)  |
| B             | 20                 | 6.75 (171)  |
| C             | 20                 | 6.50 (165)  |
| D             | 15                 | 6.25 (158)  |
| E             | 15                 | 6.00 (151)  |

① Impeller diameter in inches and millimeters (mm).


### Prime Line® Performance Curves - Size 3P4, 50 Hz, 2850 RPM

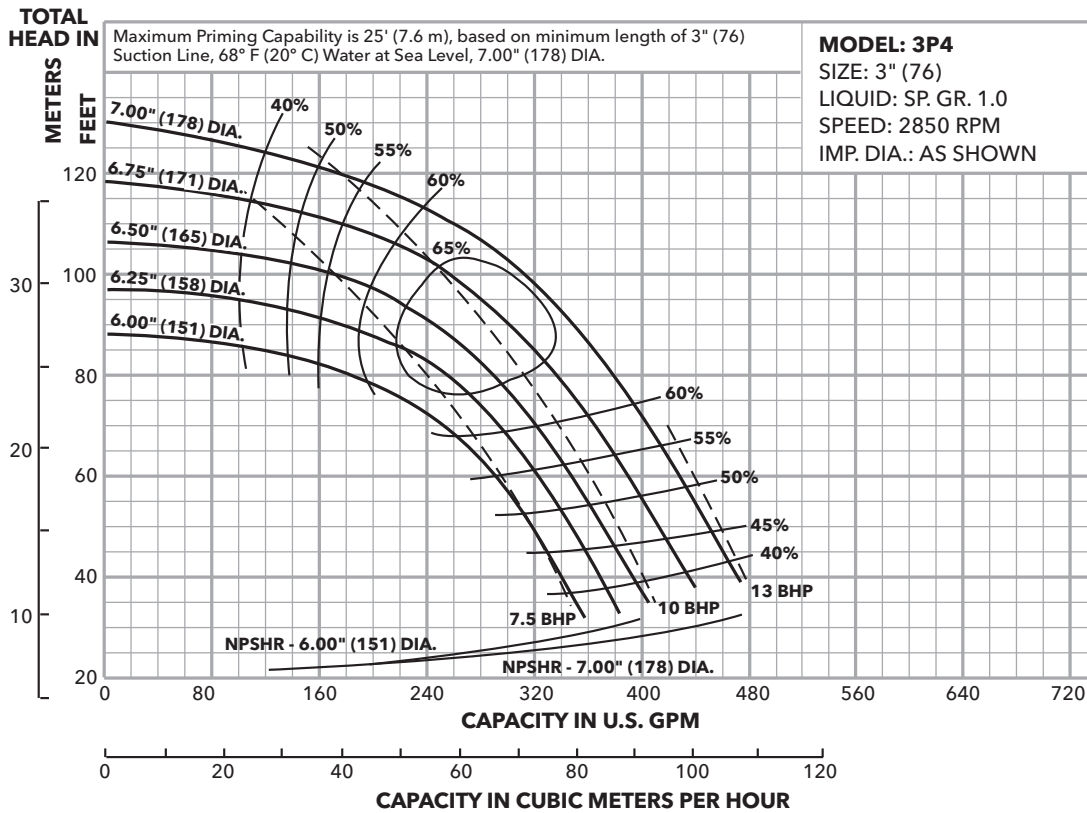

| Ordering Code | Standard HP Rating | Imp. Dia. ① |
|---------------|--------------------|-------------|
| A             | 15                 | 7.00 (178)  |
| B             | 15                 | 6.75 (171)  |
| C             | 10                 | 6.50 (165)  |
| D             | 10                 | 6.25 (158)  |
| E             | 7½*                | 6.00 (151)  |

\* Requires service factor.  
 ① Impeller diameter in inches and millimeters (mm).

### Prime Line® Performance Curves - Size 3P4, 60 Hz, 1750 RPM

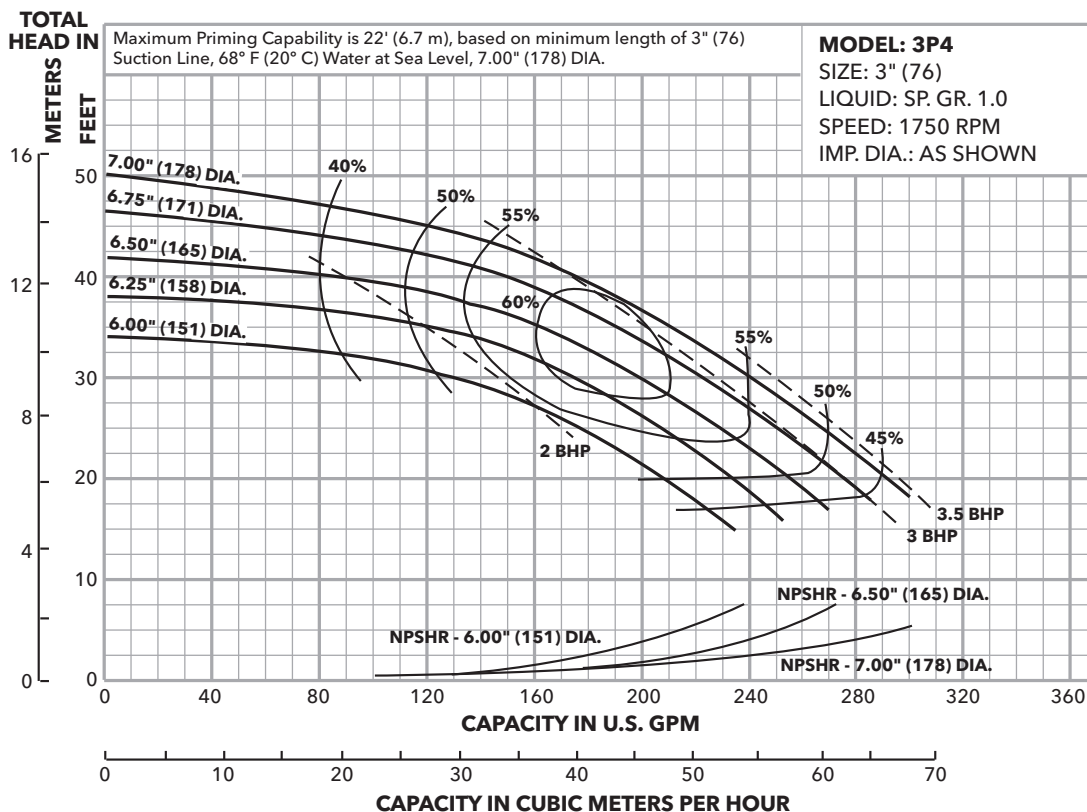


| Ordering Code | Standard HP Rating | Imp. Dia. ① |
|---------------|--------------------|-------------|
| A             | 5                  | 7.00 (178)  |
| B             | 3                  | 6.75 (171)  |
| C             | 3                  | 6.50 (165)  |
| D             | 3                  | 6.25 (158)  |
| E             | 2*                 | 6.00 (151)  |

\* Requires service factor.  
 ① Impeller diameter in inches and millimeters (mm).



### Prime Line® Performance Curves - Size 4P1, 60 Hz, 1750 RPM

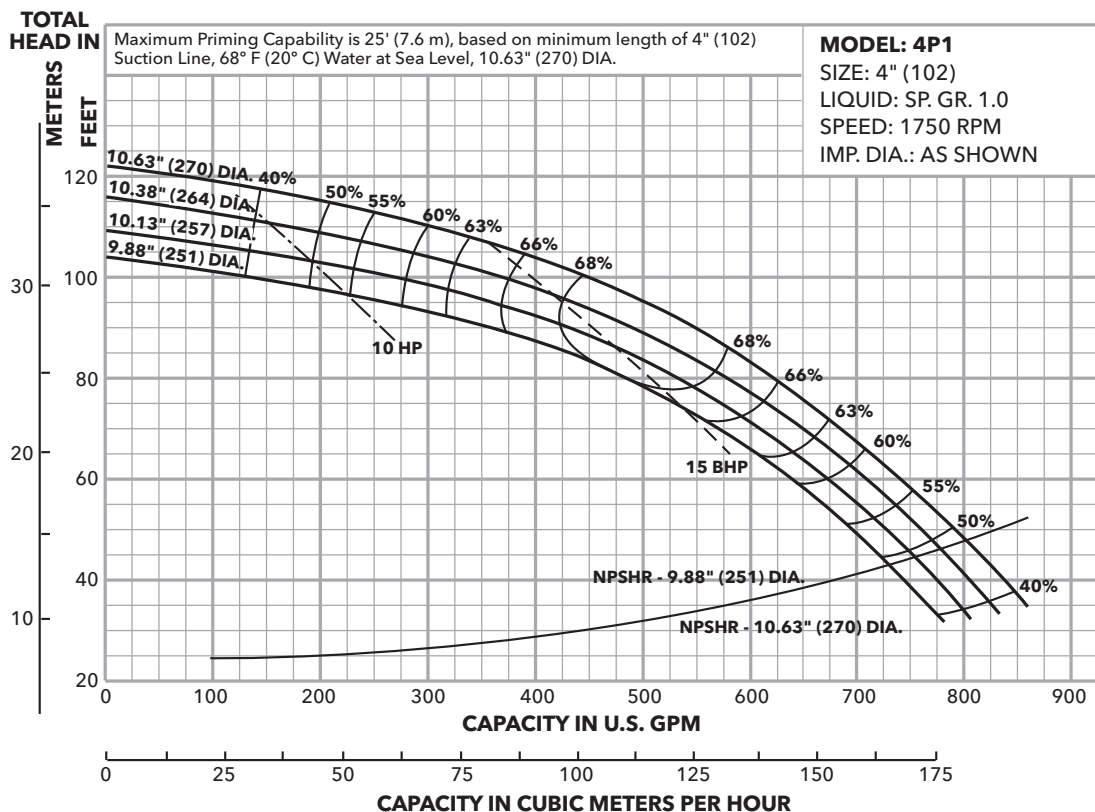


| Ordering Code | Standard HP Rating | Imp. Dia. ① |
|---------------|--------------------|-------------|
| A             | 20                 | 10.63 (270) |
| B             | 20                 | 10.38 (264) |
| C             | 20                 | 10.13 (257) |
| D             | 15*                | 9.88 (251)  |

\* Requires service factor.

① Impeller diameter in inches and millimeters (mm).

### Prime Line® Performance Curves - Size 4P1, 50 Hz, 1450 RPM

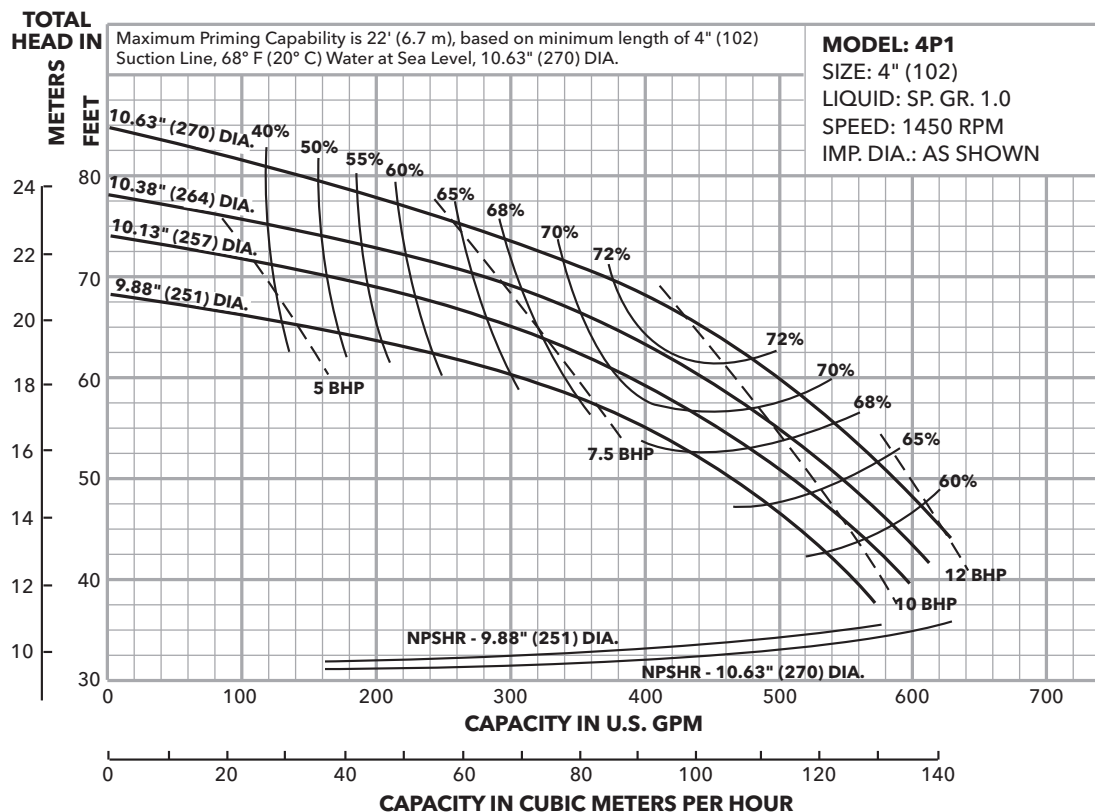


| Ordering Code | Standard HP Rating | Imp. Dia. ① |
|---------------|--------------------|-------------|
| A             | 15                 | 10.63 (270) |
| B             | 15                 | 10.38 (264) |
| C             | 10*                | 10.13 (257) |
| D             | 10                 | 9.88 (251)  |

\* Requires service factor.


① Impeller diameter in inches and millimeters (mm).

### Prime Line® Performance Curves - Size 4P1, 60 Hz, 1150 RPM

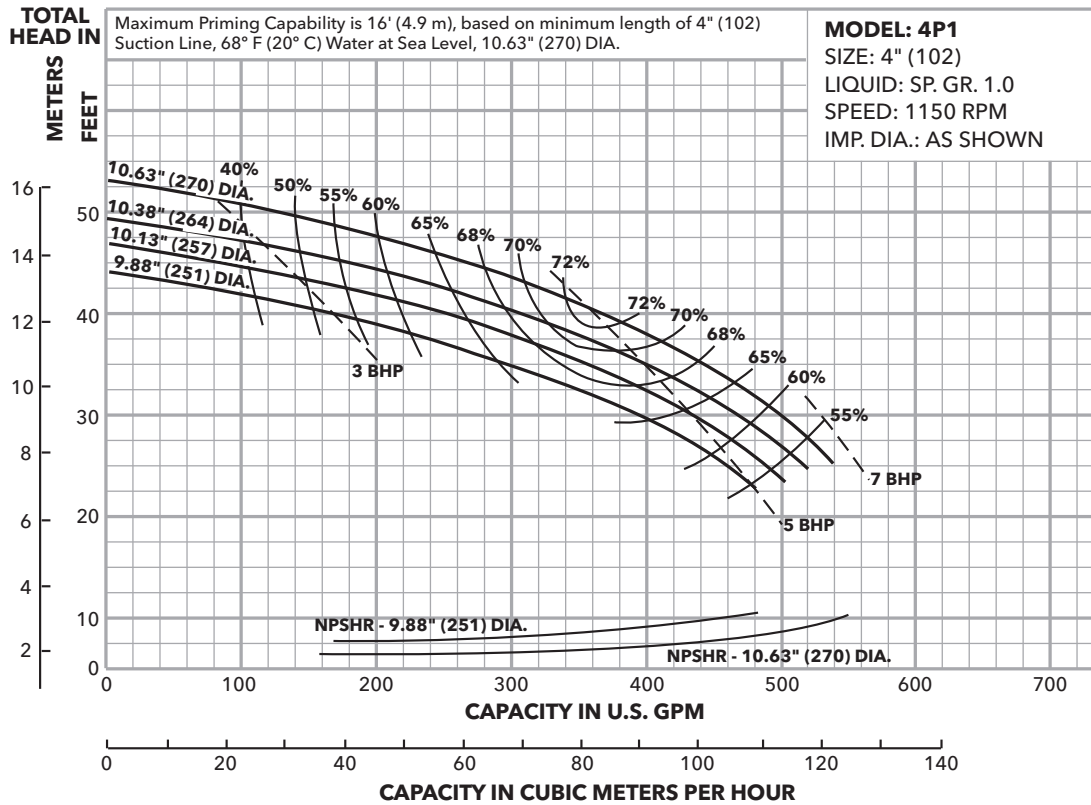


| Ordering Code | Standard HP Rating | Imp. Dia. ① |
|---------------|--------------------|-------------|
| A             | 7½                 | 10.63 (270) |
| B             | 7½                 | 10.38 (264) |
| C             | 7½                 | 10.13 (257) |
| D             | 5                  | 9.88 (251)  |

① Impeller diameter in inches and millimeters (mm).




### Prime Line® Performance Curves - Size 4P2, 60 Hz, 1750 RPM

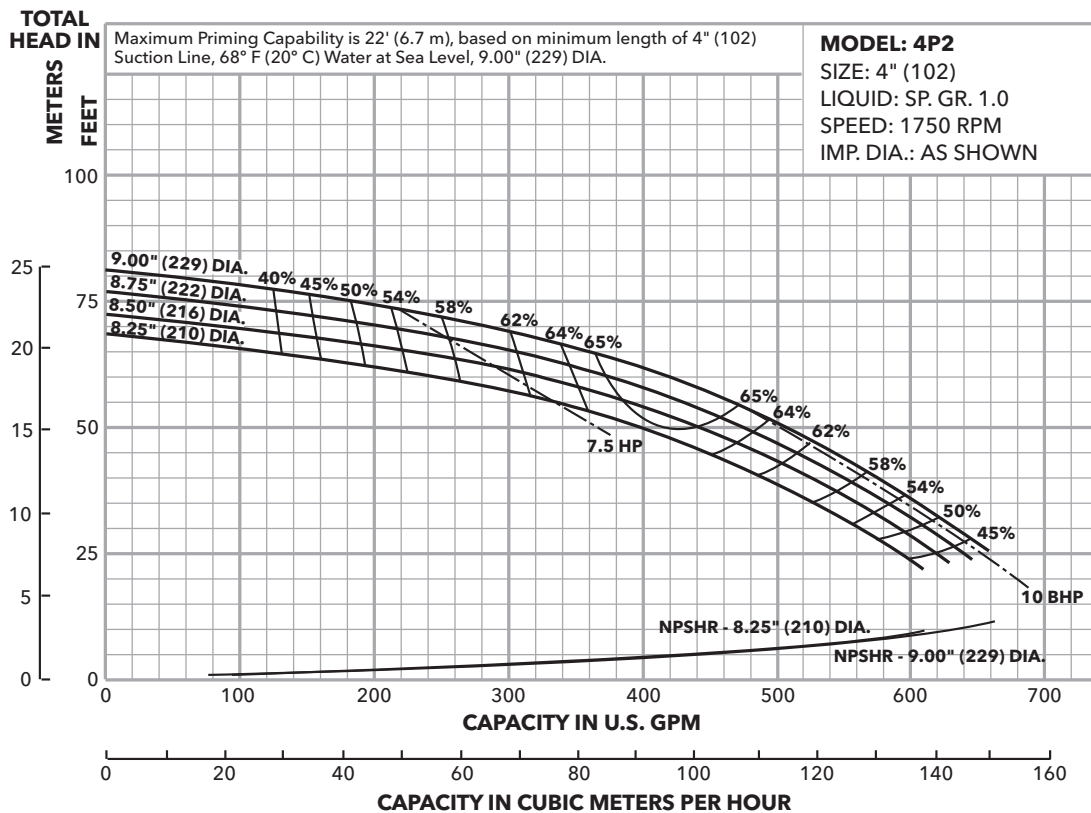


| Ordering Code | Standard HP Rating | Imp. Dia. ① |
|---------------|--------------------|-------------|
| A             | 10*                | 9.00 (229)  |
| B             | 10                 | 8.75 (222)  |
| C             | 10                 | 8.50 (216)  |
| D             | 7½*                | 8.25 (210)  |

\* Requires service factor.

① Impeller diameter in inches and millimeters (mm).




### Prime Line® Performance Curves - Size 4P2, 50 Hz, 1450 RPM

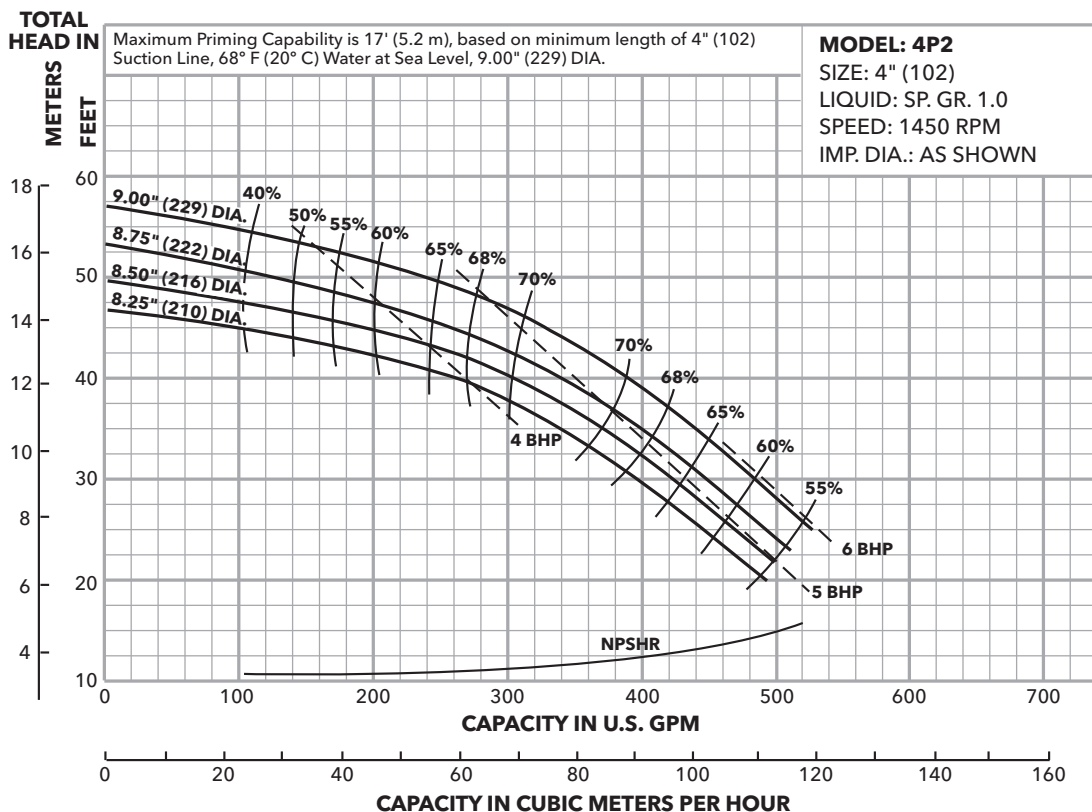


| Ordering Code | Standard HP Rating | Imp. Dia.① |
|---------------|--------------------|------------|
| A             | 7½                 | 9.00 (229) |
| B             | 7½                 | 8.75 (222) |
| C             | 5                  | 8.50 (216) |
| D             | 5                  | 8.25 (210) |

① Impeller diameter in inches and millimeters (mm).




### Prime Line® Performance Curves - Size 4P2, 60 Hz, 1150 RPM

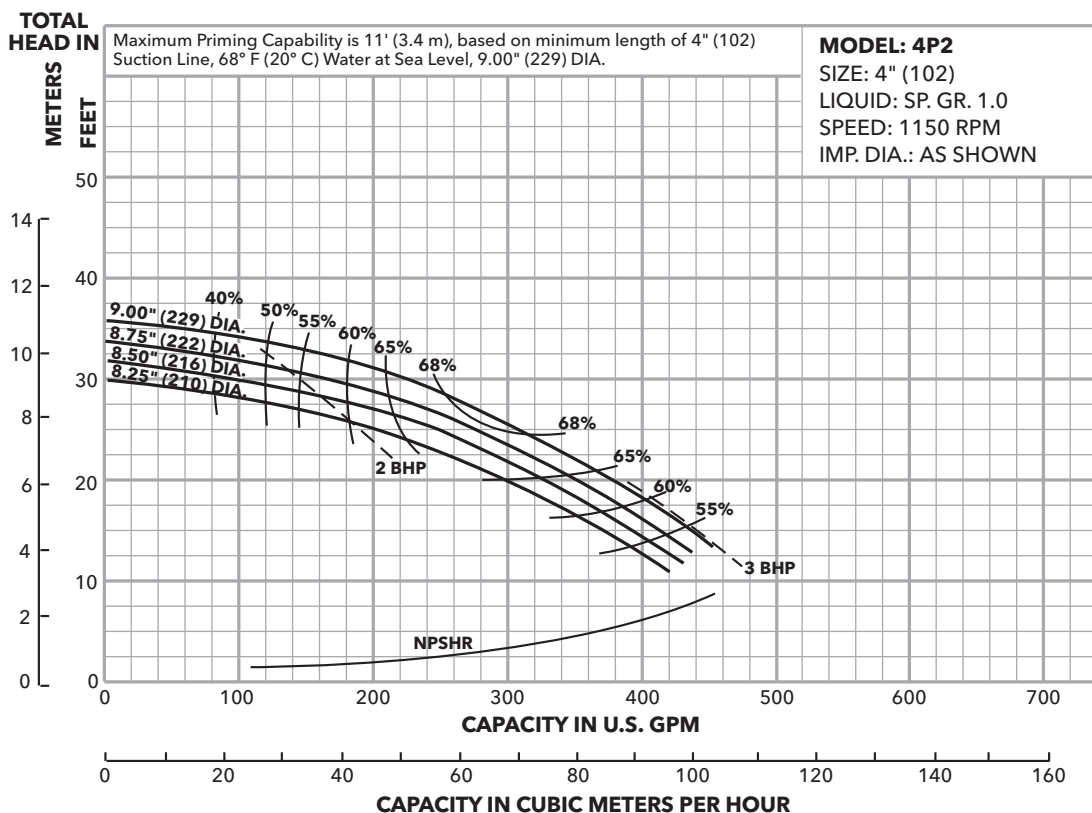


| Ordering Code | Standard HP Rating | Imp. Dia.① |
|---------------|--------------------|------------|
| A             | 3                  | 9.00 (229) |
| B             | 3                  | 8.75 (222) |
| C             | 3                  | 8.50 (216) |
| D             | 3                  | 8.25 (210) |

① Impeller diameter in inches and millimeters (mm).




### Prime Line® Performance Curves - Size 4E1, 60 Hz, 1750 RPM

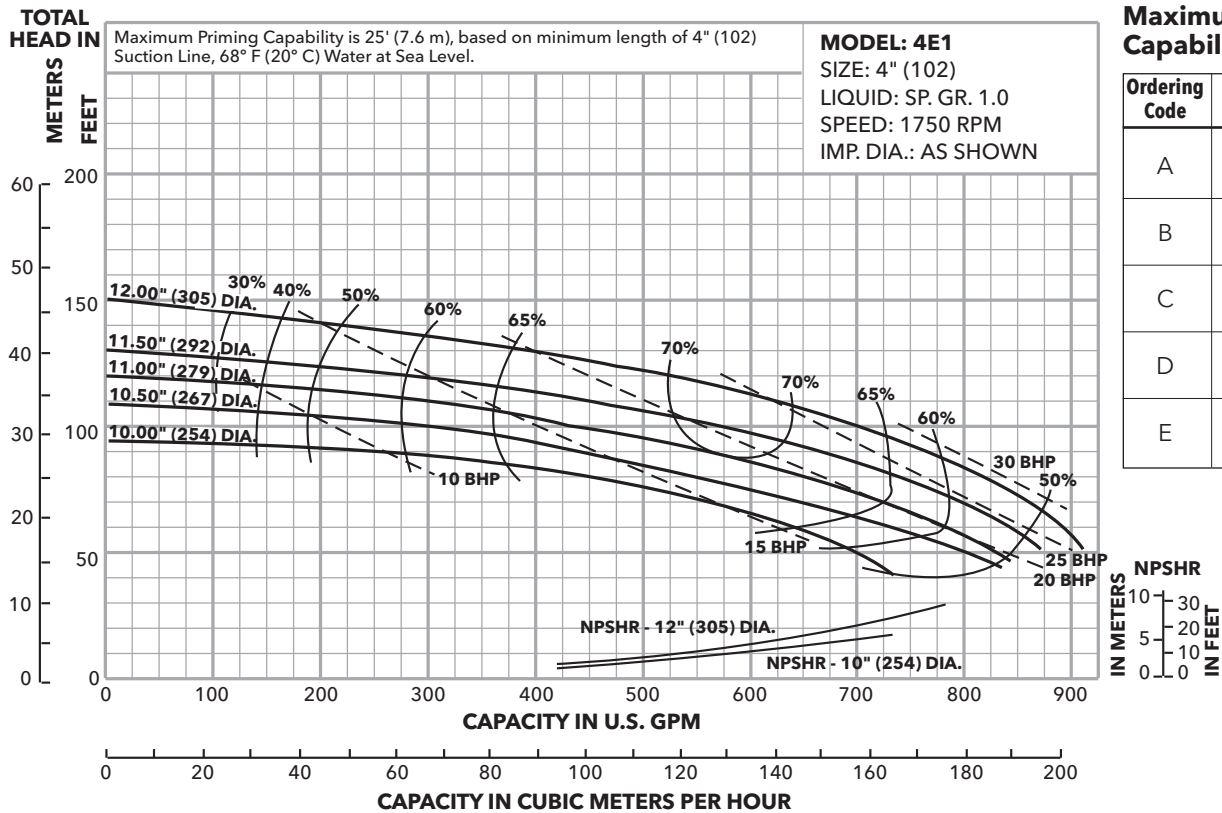


#### Maximum Priming Capability is:

| Ordering Code | Imp. Dia.   | Max. Lift   |
|---------------|-------------|-------------|
| A             | 12.0" (305) | 25' (7.6 m) |
| B             | 11.5" (292) | 22' (6.7 m) |
| C             | 11.0" (279) | 19' (5.8 m) |
| D             | 10.5" (267) | 17' (5.2 m) |
| E             | 10.0" (254) | 16' (4.9 m) |


### Prime Line® Performance Curves - Size 4E1, 50 Hz, 1450 RPM

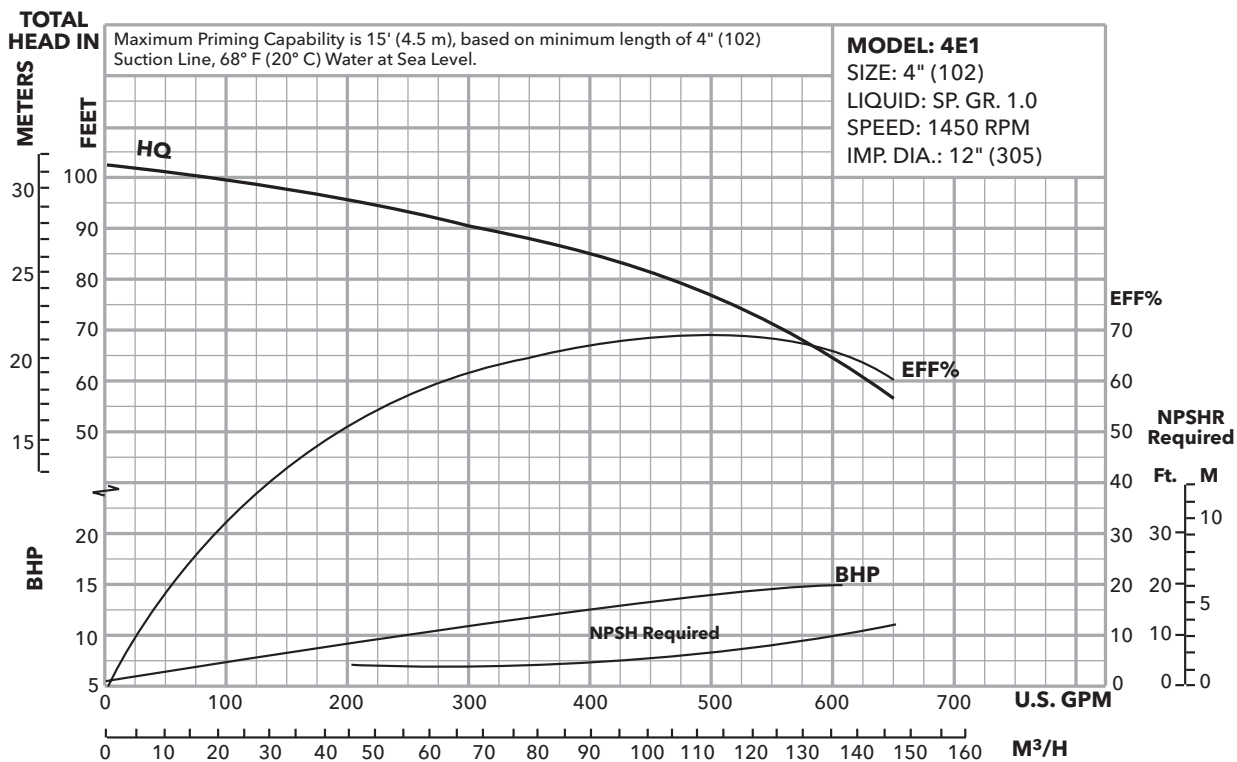

### Prime Line® Performance Curves - Size 4E1, 60 Hz, 1150 RPM

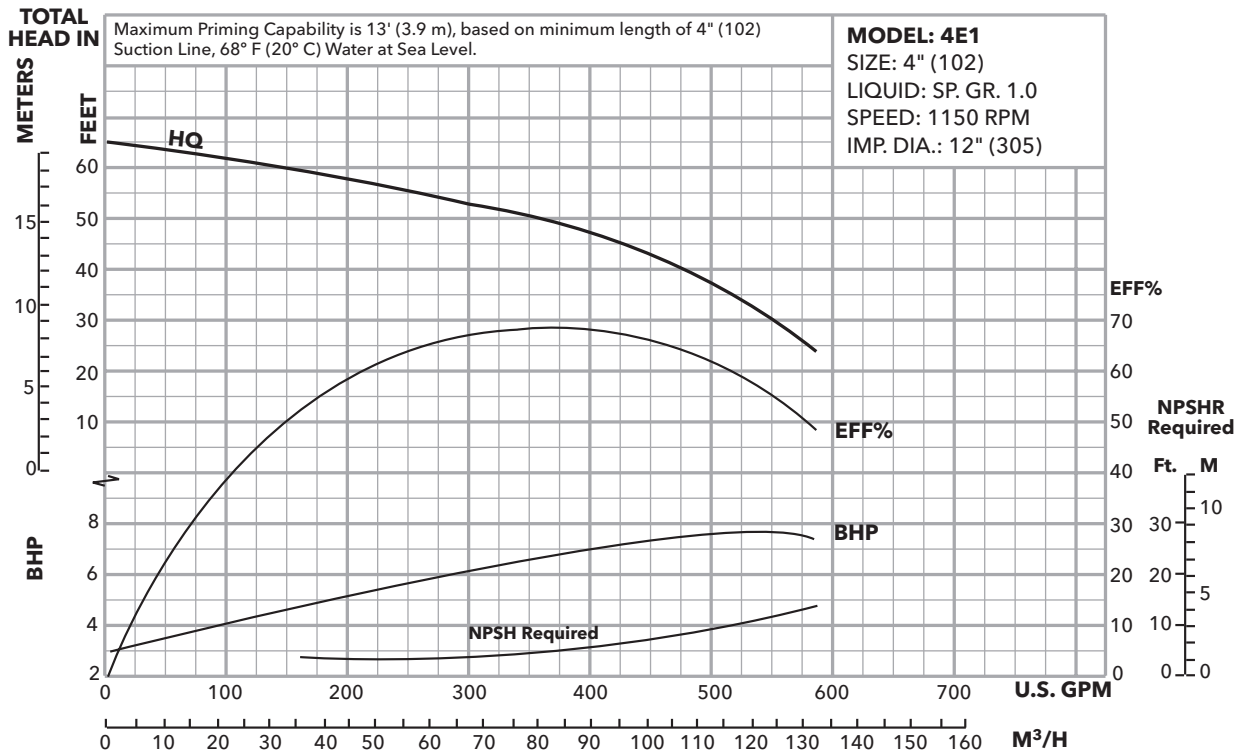


### Prime Line® Performance Curves - Size 6E1, 60 Hz, 1750 RPM

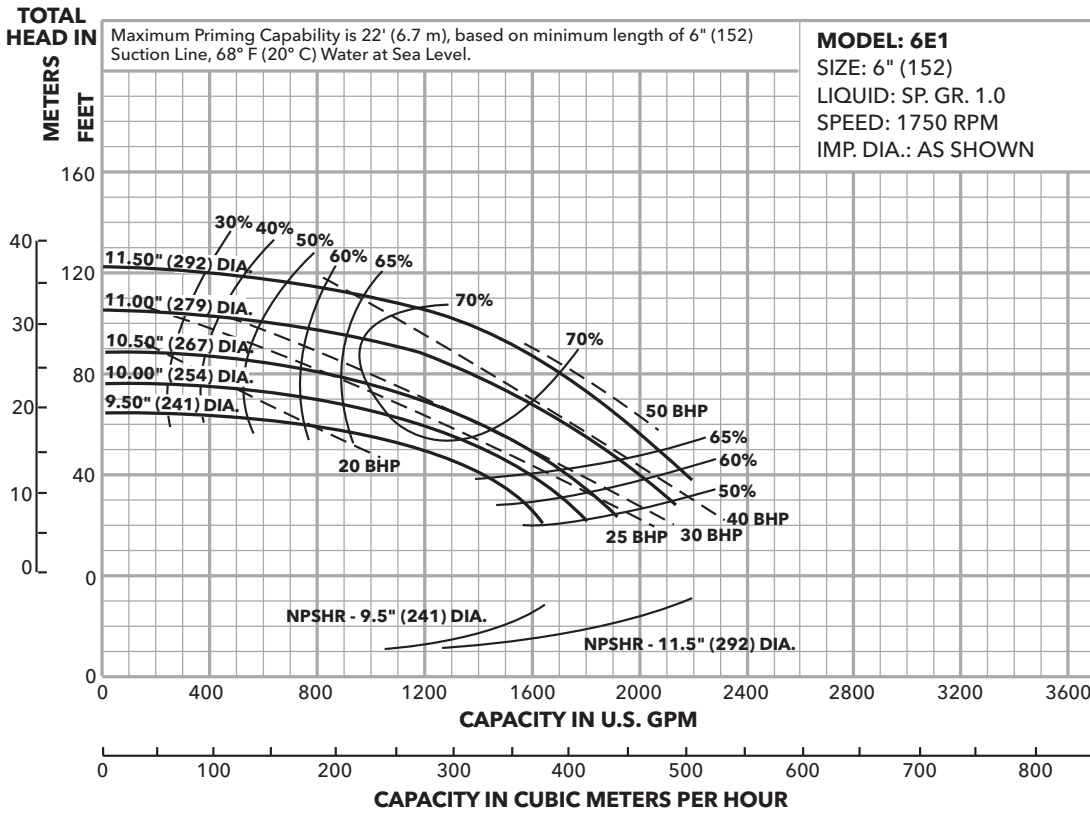

#### Maximum Priming Capability is:

| Ordering Code | Imp. Dia.   | Max. Lift   |
|---------------|-------------|-------------|
| A             | 11.5" (292) | 22' (6.7 m) |
| B             | 11.0" (279) | 20' (6.1 m) |
| C             | 10.5" (267) | 16' (4.8 m) |
| D             | 10.0" (254) | 16' (4.8 m) |
| E             | 9.5" (241)  | 15' (4.5 m) |


### Prime Line® Performance Curves - Size 6E1, 50 Hz, 1450 RPM

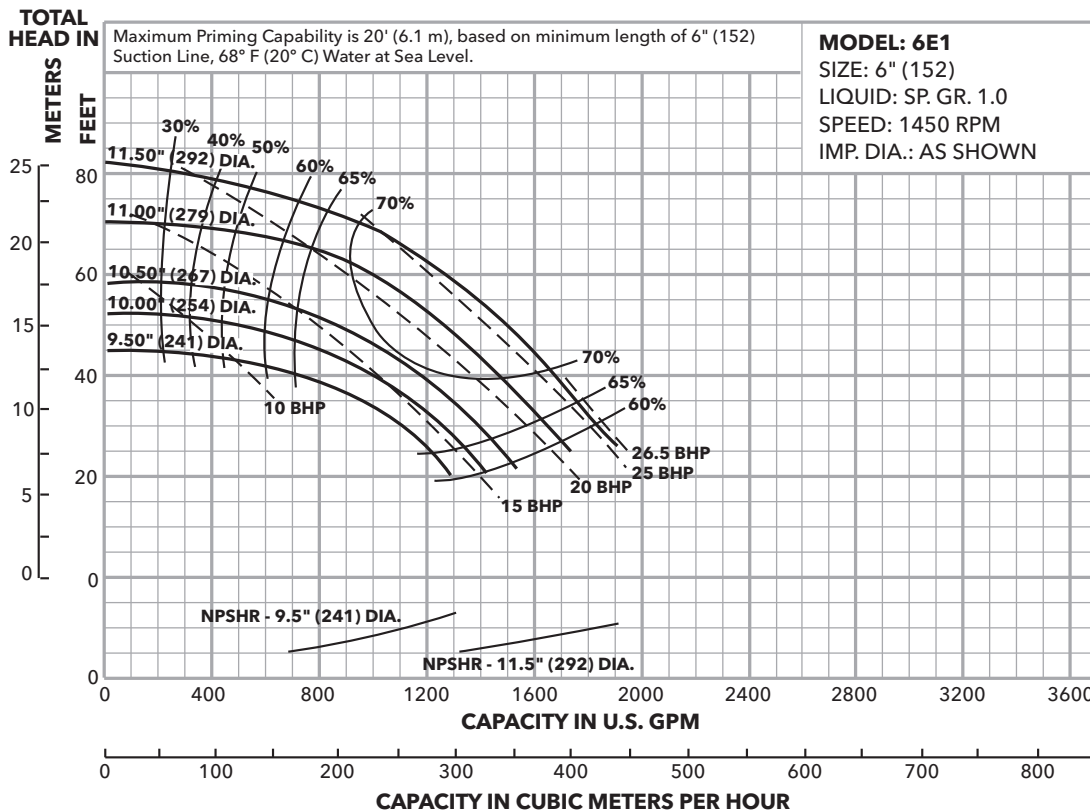

#### Maximum Priming Capability is:


| Ordering Code | Imp. Dia.   | Max. Lift   |
|---------------|-------------|-------------|
| A             | 11.5" (292) | 20' (6.1 m) |
| B             | 11.0" (279) | 17' (5.2 m) |
| C             | 10.5" (267) | 14' (4.2 m) |
| D             | 10.0" (254) | 14' (4.2 m) |
| E             | 9.5" (241)  | 13' (3.9 m) |

### Prime Line® Performance Curves - Size 6E1, 60 Hz, 1150 RPM

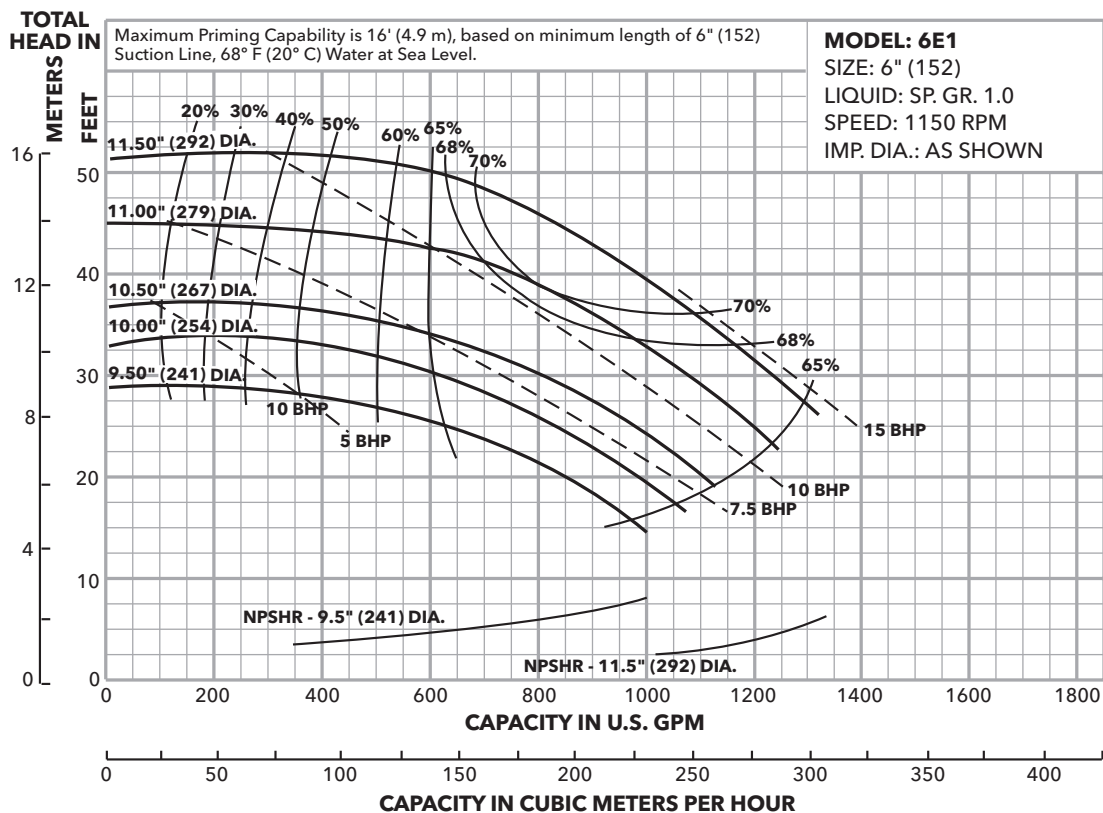


#### Maximum Priming Capability is:

| Ordering Code | Imp. Dia.   | Max. Lift   |
|---------------|-------------|-------------|
| A             | 11.5" (292) | 16' (4.9 m) |
| B             | 11.0" (279) | 13' (3.9 m) |
| C             | 10.5" (267) | 11' (3.3 m) |
| D             | 10.0" (254) | 11' (3.3 m) |
| E             | 9.5" (241)  | 10' (3.0 m) |




### Prime Line® Performance Curves - Size 6E2, 60 Hz, 1750 RPM

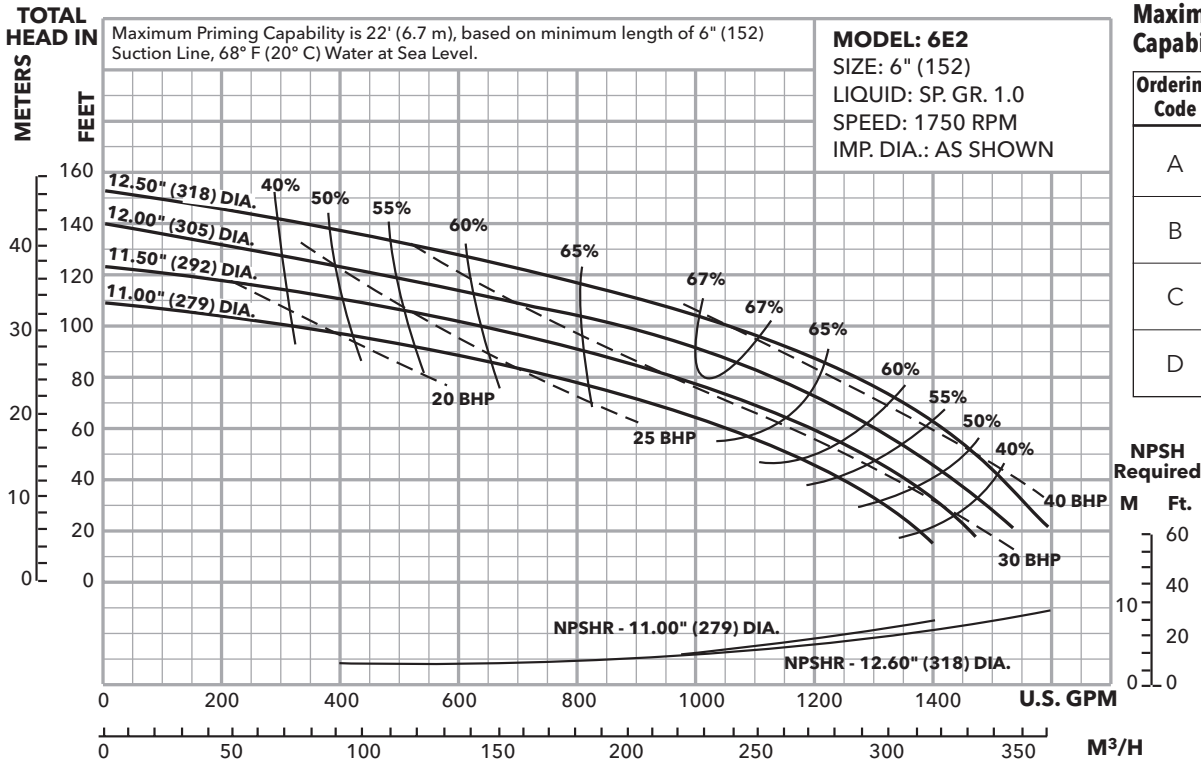

#### Maximum Priming Capability is:

| Ordering Code | Imp. Dia.   | Max. Lift   |
|---------------|-------------|-------------|
| A             | 12.5" (318) | 22' (6.7 m) |
| B             | 12.0" (305) | 18' (5.5 m) |
| C             | 11.5" (292) | 14' (4.3 m) |
| D             | 11.0" (279) | 10' (3.0 m) |

### Prime Line® Performance Curves - Size 6E2, 50 Hz, 1450 RPM

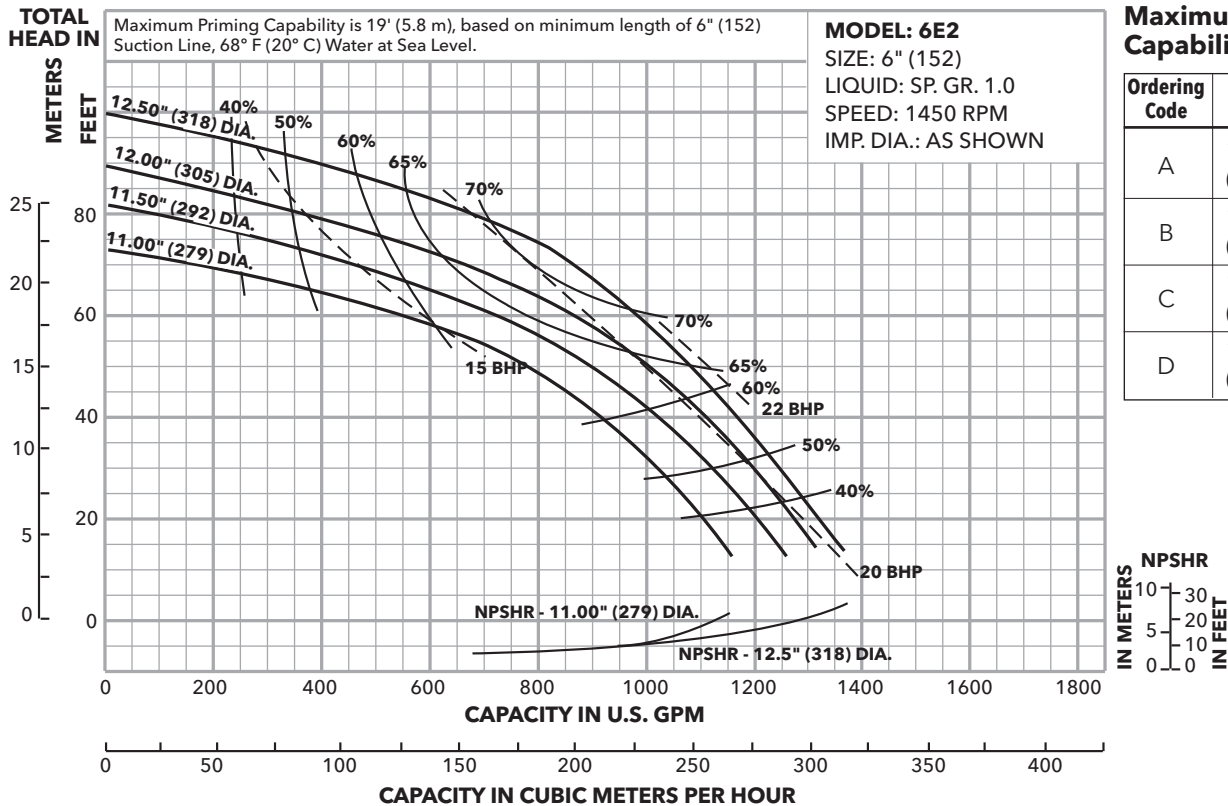


#### Maximum Priming Capability is:

| Ordering Code | Imp. Dia.   | Max. Lift   |
|---------------|-------------|-------------|
| A             | 12.5" (318) | 19' (5.8 m) |
| B             | 12.0" (305) | 15' (4.5 m) |
| C             | 11.5" (292) | 12' (3.6 m) |
| D             | 11.0" (279) | 9' (2.7 m)  |




### Prime Line® Performance Curves - Size 6E2, 60 Hz, 1150 RPM

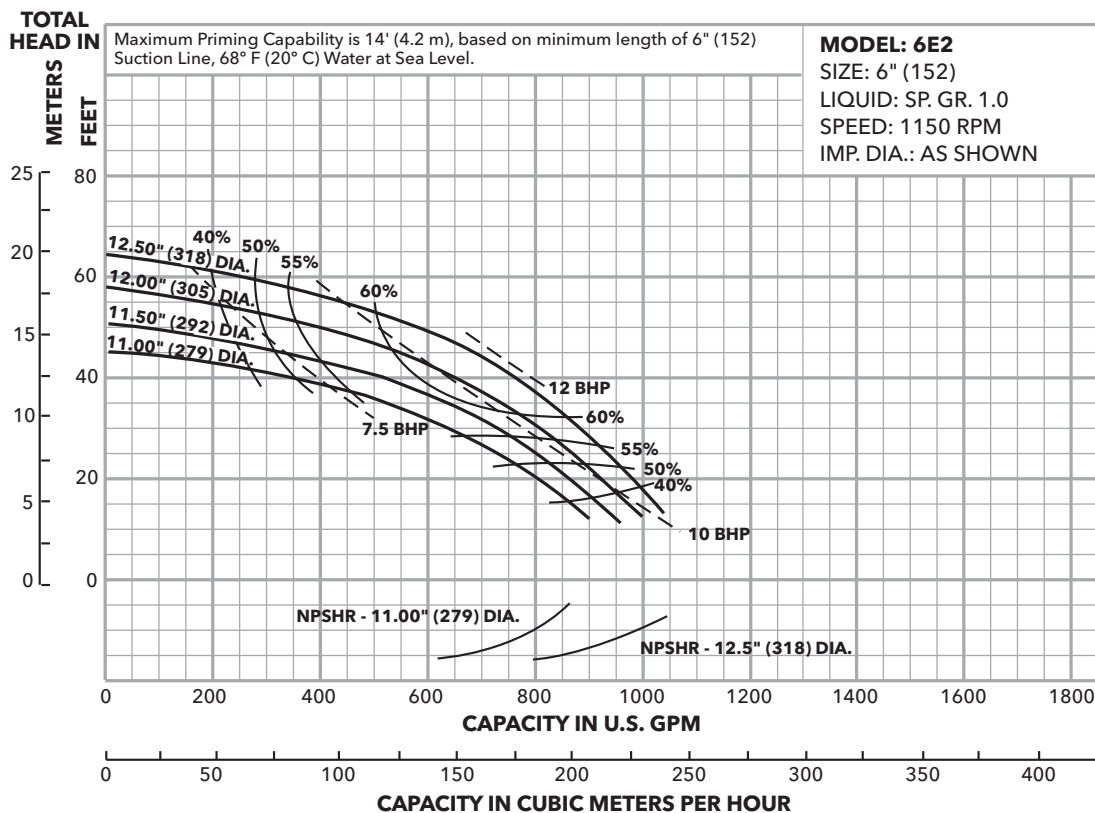

#### Maximum Priming Capability is:

| Ordering Code | Imp. Dia.   | Max. Lift   |
|---------------|-------------|-------------|
| A             | 12.5" (318) | 14' (4.2 m) |
| B             | 12.0" (305) | 10' (3.0 m) |
| C             | 11.5" (292) | 9' (2.7 m)  |
| D             | 11.0" (279) | 8' (2.4 m)  |

### Prime Line® Dimensions – 2P - 4P Pump End

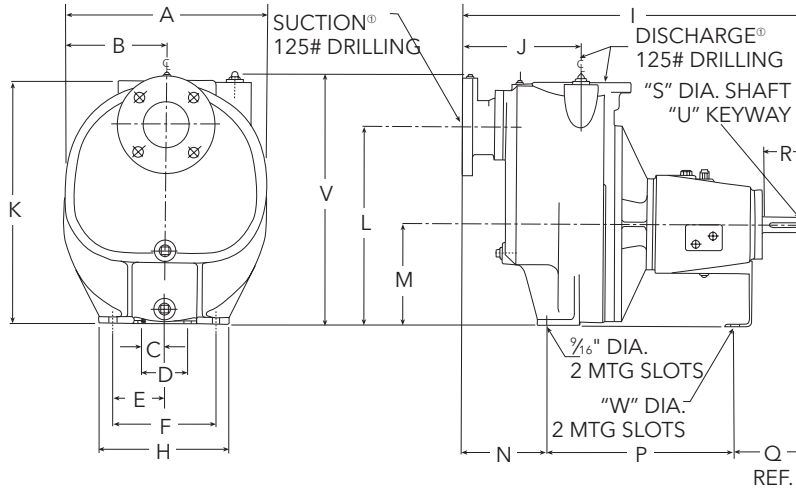


#### Pump End

| Model | Suction®                 | Discharge®               | A            | B           | C | D | E           | F            | H           | I            | J            | K            | L            | M            | N            | P            | Q           | R           | S          | U                 | V            | W         |             |             |            |                   |              |
|-------|--------------------------|--------------------------|--------------|-------------|---|---|-------------|--------------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------------|-------------|------------|-------------------|--------------|-----------|-------------|-------------|------------|-------------------|--------------|
| 2P1   | 2" NPT<br>Female<br>(51) | 2" NPT<br>Female<br>(51) | 12¼<br>(311) | 6⅝<br>(156) | 1 | 2 | 4<br>(102)  | 8<br>(203)   | 10<br>(254) | 23½<br>(597) | 8⅛<br>(227)  | 17<br>(432)  | 13⅝<br>(253) | 6¼<br>(159)  | 5⅝<br>(143)  | 11⅞<br>(292) | 6⅝<br>(165) | 3<br>(76)   | 1⅝<br>(29) | ¼ x ⅝<br>(6 x 3)  | 17⅞<br>(446) | ½<br>(13) |             |             |            |                   |              |
| 2P2   |                          |                          |              |             |   |   |             |              |             | 24¼<br>(616) | 9⅝<br>(232)  | 19<br>(483)  | 15½<br>(394) | 8<br>(203)   | 6⅞<br>(167)  | 11⅞<br>(286) |             |             |            |                   |              |           |             |             |            |                   |              |
| 2P3   |                          |                          |              |             |   |   |             |              |             | 32⅞<br>(838) | 32⅞<br>(838) | 32⅞<br>(838) | 32⅞<br>(838) | 32⅞<br>(838) | 18⅝<br>(464) | 18⅝<br>(464) |             |             |            |                   |              |           | 7⅝<br>(191) | 3⅝<br>(101) | 1⅝<br>(41) | ⅝ x ⅜<br>(10 x 5) | 24⅞<br>(611) |
| 2P4   |                          |                          |              |             |   |   |             |              |             | 32⅞<br>(838) | 32⅞<br>(838) | 32⅞<br>(838) | 32⅞<br>(838) | 32⅞<br>(838) | 18⅝<br>(464) | 18⅝<br>(464) |             |             |            |                   |              |           | 7⅝<br>(191) | 3⅝<br>(101) | 1⅝<br>(41) | ⅝ x ⅜<br>(10 x 5) | 24⅞<br>(611) |
| 3P1   | 3"<br>(76)               | 3"<br>(76)               | 15½<br>(391) | 7¾<br>(197) | 1 | 2 | 6¼<br>(159) | 12½<br>(318) | 15<br>(381) | 35⅝<br>(902) | 11⅞<br>(294) | 23½<br>(597) | 18<br>(457)  | 10<br>(254)  | 8⅞<br>(217)  | 19½<br>(495) | 7⅝<br>(191) | 3⅝<br>(101) | 1⅝<br>(41) | ⅝ x ⅜<br>(10 x 5) | 24⅞<br>(611) | ½<br>(13) |             |             |            |                   |              |
| 3P2   |                          |                          |              |             |   |   |             |              |             | 24¼<br>(616) | 9⅝<br>(232)  | 19<br>(483)  | 15½<br>(394) | 8<br>(203)   | 6⅞<br>(167)  | 11⅞<br>(286) |             |             |            |                   |              |           |             |             |            |                   |              |
| 3P3   |                          |                          |              |             |   |   |             |              |             | 32⅞<br>(838) | 32⅞<br>(838) | 32⅞<br>(838) | 32⅞<br>(838) | 32⅞<br>(838) | 18⅝<br>(464) | 18⅝<br>(464) |             |             |            |                   |              |           | 7⅝<br>(191) | 3⅝<br>(101) | 1⅝<br>(41) | ⅝ x ⅜<br>(10 x 5) | 24⅞<br>(611) |
| 3P4   |                          |                          |              |             |   |   |             |              |             | 32⅞<br>(838) | 32⅞<br>(838) | 32⅞<br>(838) | 32⅞<br>(838) | 32⅞<br>(838) | 18⅝<br>(464) | 18⅝<br>(464) |             |             |            |                   |              |           | 7⅝<br>(191) | 3⅝<br>(101) | 1⅝<br>(41) | ⅝ x ⅜<br>(10 x 5) | 24⅞<br>(611) |
| 4P1   | 4"<br>(102)              | 4"<br>(102)              | 19¼<br>(489) | 9⅝<br>(245) | 1 | 2 | 6¼<br>(159) | 12½<br>(318) | 15<br>(381) | 35⅝<br>(902) | 11⅞<br>(294) | 23½<br>(597) | 18<br>(457)  | 10<br>(254)  | 8⅞<br>(217)  | 19½<br>(495) | 7⅝<br>(191) | 3⅝<br>(101) | 1⅝<br>(41) | ⅝ x ⅜<br>(10 x 5) | 24⅞<br>(611) | ½<br>(13) |             |             |            |                   |              |
| 4P2   |                          |                          |              |             |   |   |             |              |             | 24¼<br>(616) | 9⅝<br>(232)  | 19<br>(483)  | 15½<br>(394) | 8<br>(203)   | 6⅞<br>(167)  | 11⅞<br>(286) |             |             |            |                   |              |           |             |             |            |                   |              |

① 125# drilling except 2PL series (2" NPT female)

All dimensions are in inches and millimeters (mm). Do not use for construction purposes.

### Prime Line® Dimensions – 2P - 4P Frame Mounted

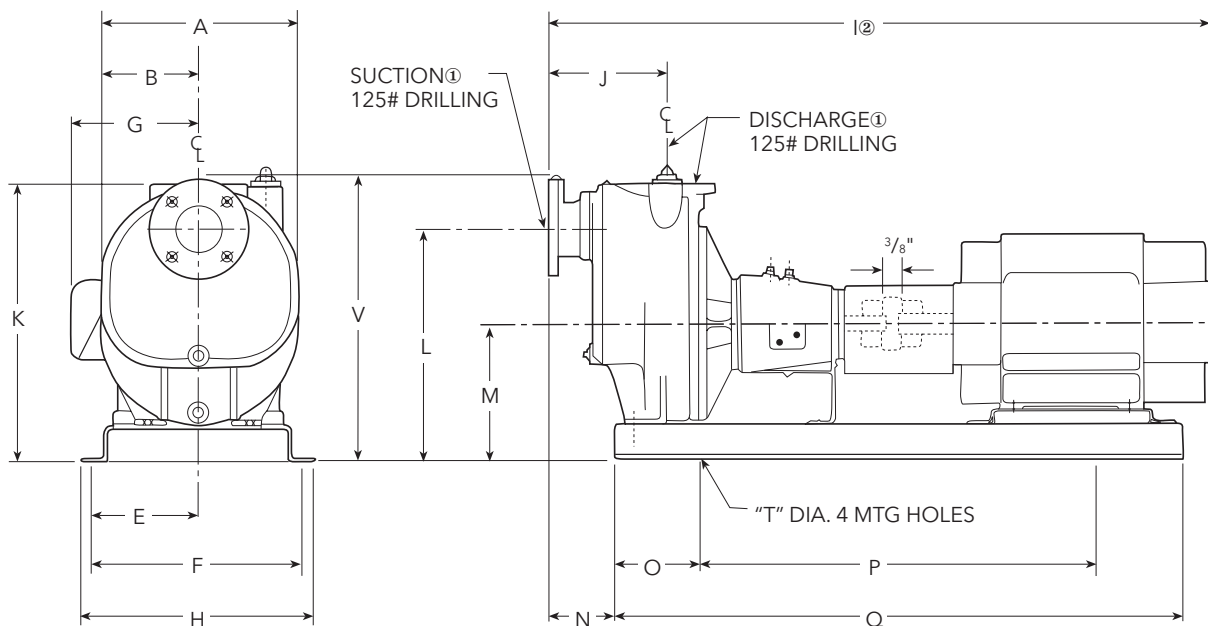

#### Pump, Base, Coupling and Guard


| Model                    | Frame      | Suction<br>①             | Discharge<br>①           | A            | B           | E           | F           | Open<br>G   | Encl.<br>G  | H            | I <sup>②</sup> | J            | K            | L            | M            | N           | O           | P            | Q            | T            | V            |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
|--------------------------|------------|--------------------------|--------------------------|--------------|-------------|-------------|-------------|-------------|-------------|--------------|----------------|--------------|--------------|--------------|--------------|-------------|-------------|--------------|--------------|--------------|--------------|--------------|-------------|-------------|-------------|-----------|-------------|--------------|-----------|-------------|--------------|-------------|--------------|-------------|------------|-------------|--------------|------------|--------------|
| 2P1<br>2P2<br>2P3<br>2P4 | 143T       | 2" NPT<br>Female<br>(51) | 2" NPT<br>Female<br>(51) | 12¼<br>(311) | 6½<br>(156) | 7½<br>(191) | 15<br>(381) | -           | 6½<br>(165) | 17<br>(432)  | 38¾(972)       | 8½<br>(227)  | 19½<br>(495) | 16¾<br>(416) | 8¾<br>(222)  | 4¾<br>(118) | 26<br>(660) | 42<br>(1067) | 1¼<br>(18)   | 22¾<br>(564) | 20½<br>(509) |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
|                          | 145T       |                          |                          |              |             |             |             | 39(991)     |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
|                          | 182T       |                          |                          |              |             |             |             | 42¾(1076)   |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
|                          | 184T       |                          |                          |              |             |             |             | 46½(1181)   |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
|                          | 213T       |                          |                          |              |             |             |             | 47¾(1213)   |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
|                          | 215T       |                          |                          |              |             |             |             | 48¾(1229)   |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
| 254T                     | 51¾(1315)  |                          |                          |              |             |             |             |             |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
| 3P1<br>3P2               | 145T       | 3"<br>(76)               | 3"<br>(76)               | 15½<br>(391) | 7¾<br>(197) | 9½<br>(241) | 19<br>(483) | -           | 6½<br>(165) | 20½<br>(521) | 47¾(1213)      | 9¾<br>(232)  | 21½<br>(546) | 18<br>(457)  | 10½<br>(267) | 4¾<br>(121) | 8<br>(203)  | 32<br>(813)  | 48<br>(1219) | 1¼<br>(18)   | 22¾<br>(564) |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
|                          | 182T       |                          |                          |              |             |             |             | 38(965)     |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
|                          | 184T       |                          |                          |              |             |             |             | 38¾(987)    |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
|                          | 213T       |                          |                          |              |             |             |             | 42¼(1073)   |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
|                          | 215T       |                          |                          |              |             |             |             | 46¼(1175)   |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
|                          | 254T       |                          |                          |              |             |             |             | 47¾(1213)   |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
|                          | 3P3<br>3P4 |                          |                          |              |             |             |             | 145T        | 3"<br>(76)  |              | 3"<br>(76)     |              |              |              |              |             |             |              |              |              |              | 15½<br>(391) | 7¾<br>(197) | 9½<br>(241) | 19<br>(483) | -         | 6½<br>(165) | 20½<br>(521) | 47¾(1213) | 9¾<br>(232) | 21½<br>(546) | 18<br>(457) | 10½<br>(267) | 4¾<br>(121) | 8<br>(203) | 32<br>(813) | 48<br>(1219) | 1¼<br>(18) | 22¾<br>(564) |
|                          |            |                          |                          |              |             |             |             | 182T        |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             | 38(965)   |             |              |           |             |              |             |              |             |            |             |              |            |              |
|                          |            |                          |                          |              |             |             |             | 184T        |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             | 38¾(987)  |             |              |           |             |              |             |              |             |            |             |              |            |              |
|                          |            |                          |                          |              |             |             |             | 213T        |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             | 42¼(1073) |             |              |           |             |              |             |              |             |            |             |              |            |              |
| 215T                     |            | 46¼(1175)                |                          |              |             |             |             |             |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
| 254T                     |            | 47¾(1213)                |                          |              |             |             |             |             |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
| 256T                     |            | 48¾(1229)                |                          |              |             |             |             |             |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
| 284T                     |            | 51¾(1315)                |                          |              |             |             |             |             |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
| 284TS                    | 55(1397)   |                          |                          |              |             |             |             |             |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
| 286TS                    | 60¼(1530)  |                          |                          |              |             |             |             |             |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
| 324TS                    | 58¾(1492)  |                          |                          |              |             |             |             |             |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
| 4P1<br>4P2               | 213T       | 4"<br>(102)              | 4"<br>(102)              | 19¼<br>(489) | 9¾<br>(241) | 9½<br>(241) | 19<br>(483) | 7½<br>(195) | 7½<br>(195) | 20½<br>(521) | 54½(1384)      | 11¾<br>(294) | 26<br>(660)  | 20½<br>(521) | 12½<br>(318) | 7½<br>(191) | 32<br>(813) | 48<br>(1219) | 1¼<br>(18)   | 22¾<br>(564) | 26¾<br>(675) |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
|                          | 215T       |                          |                          |              |             |             |             | 58½(1486)   |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
|                          | 254T       |                          |                          |              |             |             |             | 58½(1486)   |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |
|                          | 256T       |                          |                          |              |             |             |             | 58½(1486)   |             |              |                |              |              |              |              |             |             |              |              |              |              |              |             |             |             |           |             |              |           |             |              |             |              |             |            |             |              |            |              |

① 125# drilling except 2PL series (2" NPT female).

② Actual dimension may vary depending on motor.

All dimensions are in inches and millimeters (mm). Do not use for construction.

### Prime Line® Dimensions – 2P - 4P Close Coupled

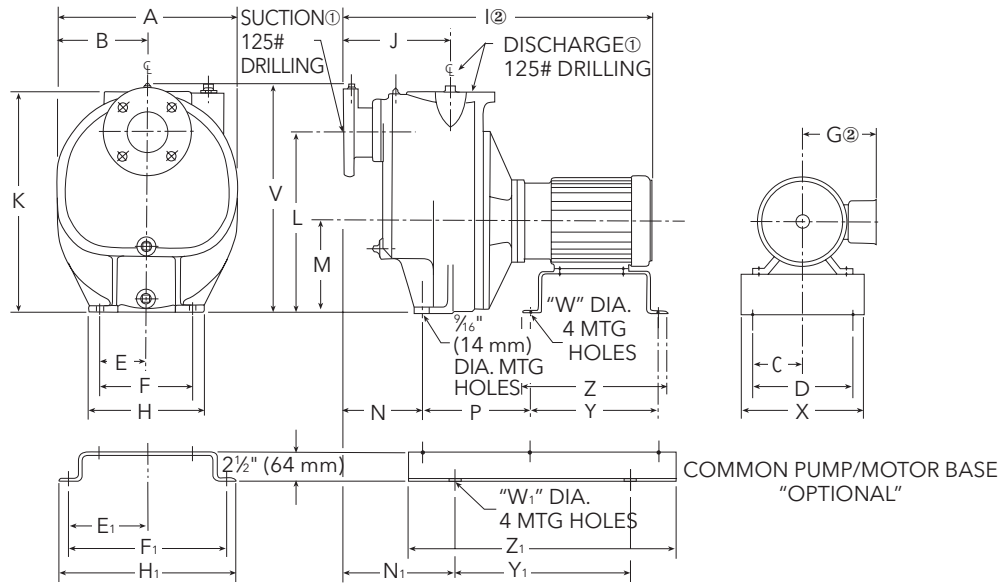

#### Close Coupled


| Model                    | Frame    | Suct. ①                  | Disch. ①                 | A               | B              | C      | D     | E      | F      | G      | H  | I ②     | J       | K      | L      | M     | N     | P      | V      | W      | X      | Y      | Z      | With Pump - Motor Base |                |                |                |                |                |                |        |        |        |        |        |        |        |       |       |    |
|--------------------------|----------|--------------------------|--------------------------|-----------------|----------------|--------|-------|--------|--------|--------|----|---------|---------|--------|--------|-------|-------|--------|--------|--------|--------|--------|--------|------------------------|----------------|----------------|----------------|----------------|----------------|----------------|--------|--------|--------|--------|--------|--------|--------|-------|-------|----|
|                          |          |                          |                          |                 |                |        |       |        |        |        |    |         |         |        |        |       |       |        |        |        |        |        |        | E <sub>1</sub>         | F <sub>1</sub> | H <sub>1</sub> | N <sub>1</sub> | W <sub>1</sub> | Y <sub>1</sub> | Z <sub>1</sub> |        |        |        |        |        |        |        |       |       |    |
| 2P1<br>2P2<br>2P3<br>2P4 | 143JM    | 2" NPT<br>Female<br>(51) | 2" NPT<br>Female<br>(51) | 12 1/4<br>(311) | 6 1/8<br>(156) | 4 1/8  | 9 1/8 | 4      | 8      | 6 1/8  | 10 | 23 1/4  | 8 15/16 | 17     | 13 3/8 | 6 1/4 | 5 1/8 | 16 5/8 | 17 1/8 | 7 1/8  | 9 1/2  | 11     | 12 3/8 | 6 5/8                  | 13 1/4         | 14 3/4         | 8 5/8          | 7 1/8          | 15             | 23             |        |        |        |        |        |        |        |       |       |    |
|                          | 145JM    |                          |                          |                 |                | (116)  | (232) |        |        |        |    | 6 1/8   |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                |                | 27 3/8 | 9 5/8  | 10 1/2 | 11 1/2 | 13 1/4 | 14 3/4 | 8 5/8  | 15    | 23    |    |
|                          | 182JM    |                          |                          |                 |                | 3      | 6     |        |        |        |    | 6 15/16 |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                |                | 27 3/8 | 9 5/8  | 10 1/2 | 11 1/2 | 13 1/4 | 14 3/4 | 8 5/8  | 15    | 23    |    |
|                          | 184JM    |                          |                          |                 |                | (76)   | (152) |        |        |        |    | (176)   |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                |                | (694)  | (236)  | (267)  | (292)  | (318)  | (375)  | (219)  | (381) | (584) |    |
|                          | 213JP    |                          |                          |                 |                | 4 1/4  | 8 1/8 |        |        |        |    | 8 1/4   |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                |                | 33 3/4 | 5 1/2  | 7 3/8  | 7 1/8  | 15 1/4 | 16 3/4 | 10 5/8 | 18    | 30    |    |
|                          | 215JP    |                          |                          |                 |                | 4 1/4  | 8 1/8 |        |        |        |    | 8 1/4   |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                |                | 34 3/4 | 7      | 8 1/8  | 7 1/8  | 15 1/4 | 16 3/4 | 10 5/8 | 18    | 30    |    |
|                          | 254JP    |                          |                          |                 |                | 5      | 10    |        |        |        |    | 9 15/16 |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                |                | 37 7/8 | 8 1/8  | 10 1/4 | 7 1/8  | 15 1/4 | 16 3/4 | 10 5/8 | 18    | 30    |    |
| 256JP                    | 5        | 10                       | 9 15/16                  | 39 3/8          | 10             | 12 1/8 | 7 1/8 | 15 1/4 | 16 3/4 | 10 5/8 | 18 | 30      |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                |                |        |        |        |        |        |        |        |       |       |    |
| 3P1<br>3P2<br>3P3<br>3P4 | 143JM    | 3" (76)                  | 3" (76)                  | 15 1/2<br>(391) | 7 3/8<br>(197) | 4 1/8  | 9 1/8 | 4      | 8      | 6 1/8  | 10 | 24 1/8  | 9 1/8   | 19     | 15 1/2 | 8     | 6 3/8 | 19 1/8 | 14 1/4 | 19 1/8 | 11 1/2 | 11 1/2 | 12 1/8 | 7 1/8                  | 15 1/4         | 16 3/4         | 11 1/8         | 18             | 30             |                |        |        |        |        |        |        |        |       |       |    |
| 145JM                    | 6 1/8    |                          |                          |                 |                |        |       |        |        |        |    | 24 1/8  |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                | 9 1/2          | 10 1/2 | 11     | 12 3/8 | 6 5/8  | 13 1/4 | 14 3/4 | 9 5/8  | 7 1/8 | 15    | 23 |
| 182JM                    | 6 15/16  |                          |                          |                 |                |        |       |        |        |        |    | 28 1/8  |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                | 9 1/4          | 26 7/8 | 27 3/8 | 31 1/8 | 6 5/8  | 13 1/4 | 14 3/4 | 9 5/8  | 7 1/8 | 15    | 23 |
| 184JM                    | (176)    |                          |                          |                 |                |        |       |        |        |        |    | (715)   |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                | (235)          | (827)  | (314)  | (349)  | (243)  | (381)  | (584)  |        |       |       |    |
| 213JP                    | 8 1/4    |                          |                          |                 |                |        |       |        |        |        |    | 34 1/4  |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                | 14 3/8         | 11 1/2 | 12 1/8 | 7 1/8  | 15 1/4 | 16 3/4 | 11 1/8 | 18     | 30    |       |    |
| 215JP                    | 8 1/4    |                          |                          |                 |                |        |       |        |        |        |    | 36      |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                | 14 3/8         | 11 1/2 | 12 1/8 | 7 1/8  | 15 1/4 | 16 3/4 | 11 1/8 | 18     | 30    |       |    |
| 254JP                    | 9 15/16  |                          |                          |                 |                |        |       |        |        |        |    | 39 3/8  |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                | 14 3/8         | 11 1/2 | 12 1/8 | 7 1/8  | 15 1/4 | 16 3/4 | 11 1/8 | 18     | 30    |       |    |
| 256JP                    | 9 15/16  |                          |                          |                 |                |        |       |        |        |        |    | 40 7/8  |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                | 14 3/8         | 11 1/2 | 12 1/8 | 7 1/8  | 15 1/4 | 16 3/4 | 11 1/8 | 18     | 30    |       |    |
| 284JP                    | 10 3/8   |                          |                          |                 |                |        |       |        |        |        |    | 41 3/8  |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                | 17 1/8         | 13 1/8 | 14 1/8 | 11 1/8 | 18     | 30     |        |        |       |       |    |
| 286JP                    | 10 3/8   |                          |                          |                 |                |        |       |        |        |        |    | 42 1/8  |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                | 17 1/8         | 13 1/8 | 14 1/8 | 11 1/8 | 18     | 30     |        |        |       |       |    |
| 324JP                    | 14 1/8   | 43 1/8                   | 17 15/16                 | 13 1/8          | 14 1/8         | 11 1/8 | 18    | 30     |        |        |    |         |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                |                |        |        |        |        |        |        |        |       |       |    |
| 4P1<br>4P2               | 213JP    | 4" (102)                 | 4" (102)                 | 19 1/4<br>(489) | 9 5/8<br>(245) | 4 1/8  | 9 1/8 | 6 1/4  | 12 1/2 | 9 1/8  | 15 | 37 3/8  | 11 1/8  | 23 1/2 | 18     | 10    | 8 3/8 | 24 1/8 | 15 1/4 | 24 1/8 | 11 3/8 | 11 1/2 | 12 1/8 | 9 3/8                  | 18 3/4         | 20 1/4         | 11 1/8         | 21             | 33             |                |        |        |        |        |        |        |        |       |       |    |
| 215JP                    | 38 13/16 |                          |                          |                 |                |        |       |        |        |        |    | 13 1/8  |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                | 14 1/8         | 11 1/8 | 18     | 30     |        |        |        |        |       |       |    |
| 254JP                    | 41 15/16 |                          |                          |                 |                |        |       |        |        |        |    | 13 1/8  |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                | 14 1/8         | 11 1/8 | 18     | 30     |        |        |        |        |       |       |    |
| 256JP                    | 43 1/16  |                          |                          |                 |                |        |       |        |        |        |    | 13 1/8  |         |        |        |       |       |        |        |        |        |        |        |                        |                |                |                |                |                | 14 1/8         | 11 1/8 | 18     | 30     |        |        |        |        |       |       |    |

① 125# drilling except 2PL series (2" NPT female).

All dimensions are in inches and millimeters (mm). Do not use for construction purposes.


② Actual dimension may vary depending on motor.

### Prime Line® Dimensions – 4E - 6E

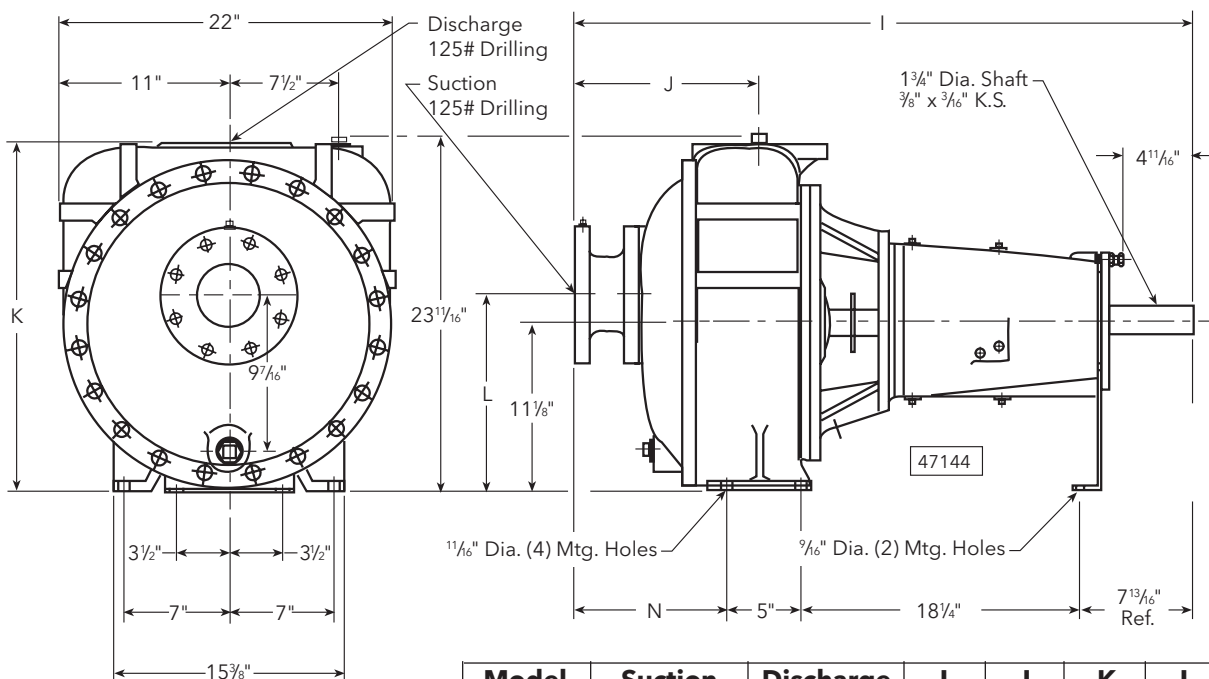

| Model | Suction | Discharge | I                               | J                               | K                              | L                              | N                               |
|-------|---------|-----------|---------------------------------|---------------------------------|--------------------------------|--------------------------------|---------------------------------|
| 4E    | 4       | 4         | 40 <sup>7</sup> / <sub>8</sub>  | 12 <sup>5</sup> / <sub>16</sub> | 23                             | 13                             | 9 <sup>13</sup> / <sub>16</sub> |
| 6E    | 6       | 6         | 44 <sup>5</sup> / <sub>16</sub> | 15 <sup>3</sup> / <sub>4</sub>  | 24 <sup>1</sup> / <sub>2</sub> | 11 <sup>3</sup> / <sub>8</sub> | 13 <sup>1</sup> / <sub>4</sub>  |

### Pump, Base, Coupling and Motor

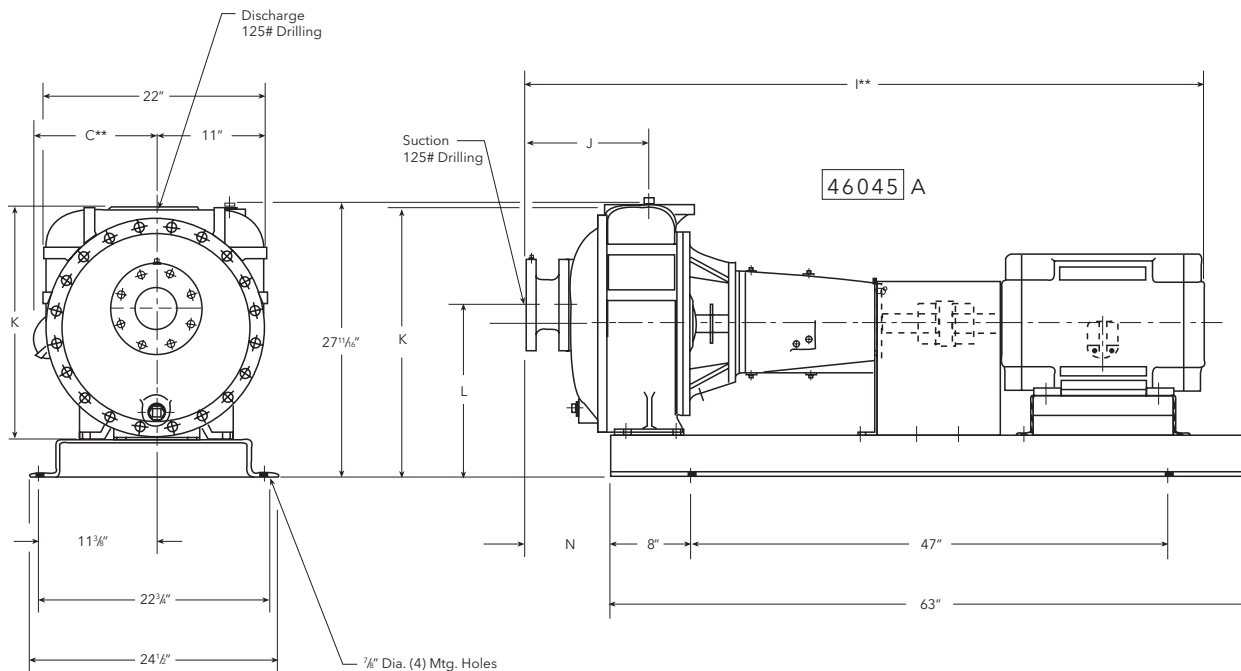

| Model | Suction | Discharge | Frame | C**                             | I**                              | J                               | K                              | L                              | N                              |
|-------|---------|-----------|-------|---------------------------------|----------------------------------|---------------------------------|--------------------------------|--------------------------------|--------------------------------|
| 4E    | 4       | 4         | 254T  | 8 <sup>15</sup> / <sub>16</sub> | 63 <sup>3</sup> / <sub>16</sub>  | 12 <sup>5</sup> / <sub>16</sub> | 27                             | 17                             | 8 <sup>5</sup> / <sub>16</sub> |
|       |         |           | 256T  |                                 | 63 <sup>15</sup> / <sub>16</sub> |                                 |                                |                                |                                |
|       |         |           | 284T  | 11 <sup>1</sup> / <sub>2</sub>  | 65 <sup>7</sup> / <sub>16</sub>  |                                 |                                |                                |                                |
|       |         |           | 286T  |                                 | 66 <sup>15</sup> / <sub>16</sub> |                                 |                                |                                |                                |
| 6E    | 6       | 6         | 256T  | 8 <sup>15</sup> / <sub>16</sub> | 67 <sup>3</sup> / <sub>8</sub>   | 15 <sup>3</sup> / <sub>4</sub>  | 28 <sup>1</sup> / <sub>2</sub> | 15 <sup>3</sup> / <sub>8</sub> | 11 <sup>3</sup> / <sub>4</sub> |
|       |         |           | 284T  | 11 <sup>1</sup> / <sub>2</sub>  | 68 <sup>7</sup> / <sub>8</sub>   |                                 |                                |                                |                                |
|       |         |           | 286T  |                                 | 70 <sup>3</sup> / <sub>8</sub>   |                                 |                                |                                |                                |
|       |         |           | 324T  | 13 <sup>9</sup> / <sub>16</sub> | 71 <sup>9</sup> / <sub>16</sub>  |                                 |                                |                                |                                |
|       |         |           | 326T  |                                 | 73 <sup>1</sup> / <sub>16</sub>  |                                 |                                |                                |                                |

### Prime Line® Specifications – 2P - 4P

#### Mechanical Data

|   | 2P1                        | 2P2                 | 2P3                 | 2P4               | 3P1                                | 3P2                 | 3P3                   | 3P4                | 4P1                 | 4P2                |
|---|----------------------------|---------------------|---------------------|-------------------|------------------------------------|---------------------|-----------------------|--------------------|---------------------|--------------------|
| Suction and discharge port sizes, inches (mm)   | 2 (51) NPT                 |                     |                     |                   | 3 (76) Flanged                     |                     |                       |                    | 4 (102) Flanged     |                    |
| Flanged, flat face  | Female threaded connection |                     |                     |                   | 125 PSI (8.79 kg/cm <sup>2</sup> ) |                     |                       |                    |                     |                    |
| Minimum casing thickness, inches (mm)   | $\frac{3}{8}$ (10)         |                     |                     |                   |                                    |                     |                       |                    |                     |                    |
| Maximum working pressure  | 85 PSI                     |                     |                     |                   | 115 PSI                            |                     |                       |                    | 60 PSI              |                    |
| Maximum hydrostatic test pressure (refer to note #4)  | 130 PSI                    |                     |                     |                   | 170 PSI                            |                     |                       |                    | 90 PSI              |                    |
| Maximum diameter solids (spherical), inches (mm)  | $\frac{1}{2}$ (13)         | $\frac{7}{16}$ (11) | $\frac{7}{16}$ (11) | $\frac{5}{8}$ (8) | $\frac{7}{16}$ (11)                | $\frac{7}{16}$ (14) | $\frac{5}{8}$ (16)    | $\frac{1}{2}$ (13) | $\frac{7}{16}$ (14) | $\frac{5}{8}$ (14) |
| <b>Shaft Diameter</b>   |                            |                     |                     |                   |                                    |                     |                       |                    |                     |                    |
| a) At impeller (nominal), inches (mm)   | $\frac{7}{8}$ (22)         |                     |                     |                   |                                    |                     | 1 $\frac{1}{4}$ (32)  |                    |                     |                    |
| b) At mechanical seal, inches (mm)  | 1 $\frac{1}{4}$ (32)       |                     |                     |                   |                                    |                     | 1 $\frac{5}{8}$ (41)  |                    |                     |                    |
| c) Between bearings, inches (mm)  | 1 $\frac{5}{8}$ (41)       |                     |                     |                   |                                    |                     | 2 $\frac{5}{8}$ (59)  |                    |                     |                    |
| d) At coupling, inches (mm)   | 1 $\frac{1}{8}$ (29)       |                     |                     |                   |                                    |                     | 1 $\frac{5}{8}$ (41)  |                    |                     |                    |
| Maximum shaft deflection at shaft seal faces, inches (mm)   | Does not exceed .002 (.05) |                     |                     |                   |                                    |                     |                       |                    |                     |                    |
| <b>Bearing Housing</b>  |                            |                     |                     |                   |                                    |                     |                       |                    |                     |                    |
| a) Front radial bearing   | 6207                       |                     |                     |                   |                                    |                     | 6309                  |                    |                     |                    |
| b) Rear thrust bearing  | 6307                       |                     |                     |                   |                                    |                     | 5310                  |                    |                     |                    |
| c) Bearing centers, inches (mm)   | 4 $\frac{1}{8}$ (110)      |                     |                     |                   |                                    |                     | 6 $\frac{1}{8}$ (175) |                    |                     |                    |
| Minimum distance required to remove bearing housing assembly with impeller, stuffing box/seal plate and bracket (back pull-out) (refer to note #1), inches (mm) | 4 (102)                    |                     |                     |                   |                                    |                     |                       |                    | 5 (127)             |                    |
| Maximum temperature of liquid pumped for normal seal operation  | 200°F (93°C)               |                     |                     |                   |                                    |                     |                       |                    |                     |                    |
| Speed range, RPM  | 1450 to 2150               | 2400 to 3450        |                     |                   | 1450 to 2150                       | 2400 to 3450        | 1750 to 3450          |                    | 1150 to 2400        |                    |
| Static priming lift, with full diameter impeller at maximum allowable operating speed and with suction check valve (refer to note #2)                           | 25 feet (7.6 m)            |                     |                     |                   |                                    |                     |                       |                    |                     |                    |
| Minimum B <sub>10</sub> life hours (refer to note #3)   | 20,000 hrs +               |                     |                     |                   |                                    |                     |                       |                    |                     |                    |
| Weight, pump end only, lbs. (kg)  | 176 (80)                   | 169 (76)            | 176 (80)            | 176 (80)          | 250 (113)                          | 235 (106)           | 294 (133)             | 294 (133)          | 410 (186)           | 400 (182)          |
| Weight, back pull-out section (bearing housing, stuffing box/seal plate impeller, seal assembly, shaft, bearings, etc.), lbs. (kg)                              | 75 (34)                    | 72 (32)             | 75 (34)             | 75 (34)           | 100 (45)                           | 90 (41)             | 160 (73)              | 160 (73)           | 185 (84)            | 175 (80)           |
| Shipping weight, PEO, lbs. (kg)   | 190 (86)                   | 185 (84)            | 190 (86)            | 190 (86)          | 275 (125)                          | 260 (118)           | 310 (141)             | 310 (141)          | 425 (193)           | 415 (188)          |

#### NOTES:

1. Distance shown required for removal of complete back pull-out assembly straight out of pump casing.
2. Based on nominal pipe size with 5 feet (1.5 m) horizontal length, zero discharge head and 68°F (20°C) water temperature at sea level.
3. Based on an operating point at 50% of BEP capacity.
4. Without check valve or check valve partially open.

### Prime Line® Specifications – 4E1, 6E1, 6E2

#### Mechanical Data

|  | 4E1                  | 6E1          | 6E2          |
|--|----------------------|--------------|--------------|
| Suction and discharge port sizes, inches   | 4" x 4"              | 6" x 6"      | 6" x 6"      |
| Flanged, flat face, PSI  | 125                  | 125          | 125          |
| Minimum casing thickness, inches   | ½                    | ½            | ½            |
| Maximum working pressure, PSI  | 125                  | 65           | 145          |
| Maximum hydrostatic test pressure (refer to note #4)   | 185                  | 95           | 215          |
| Type of impeller   | Enclosed             | Open         | Enclosed     |
| Maximum diameter solids (spherical), inches  | ½                    | 1            | 1            |
| <b>Shaft Diameter</b>  |                      |              |              |
| a) At impeller (nominal), inches   | 1¾                   |              |              |
| b) At mechanical seal, inches  | 1¾                   |              |              |
| c) Between bearings, inches  | 3                    |              |              |
| d) At coupling, inches   | 1¾                   |              |              |
| Maximum shaft deflection at shaft seal faces, inches   | Does not exceed .002 |              |              |
| <b>Bearing Housing</b>   |                      |              |              |
| a) Front radial bearing, single row  | #313                 |              |              |
| b) Rear thrust bearing, single row   | #313                 |              |              |
| c) Bearing centers, inches   | 10.040               |              |              |
| Minimum distance required to remove bearing housing assembly with impeller, stuffing box/seal plate and bracket (back pull-out) (refer to note #1), inches | 5½                   |              |              |
| Maximum temperature of liquid pumped for normal seal operation   | 200°F (93°C)         |              |              |
| Speed range, RPM   | 1150 to 2400         | 1150 to 2000 | 1150 to 2600 |
| Static priming lift, with full diameter impeller at maximum allowable operating speed and with suction check valve (refer to note #2)                      | 25 feet              | 22 feet      | 22 feet      |
| Oil capacity for oil lube bearings (bearing housing)   | Approx. 52 fl. oz.   |              |              |
| Minimum L <sub>10</sub> life, hours (refer to note #3)   | 24,000               |              |              |
| Weight, pump end only, lbs.  | 550                  | 610          | 620          |
| Weight, back pull-out section (bearing housing, stuffing box/seal plate impeller, seal assembly, shaft, bearings, etc.), lbs.                              | 400                  | 460          | 470          |
| Shipping weight, PEO, lbs.   | 580                  | 640          | 650          |

#### NOTES:

1. Distance shown required for removal of complete back pull-out assembly straight out of pump casing.
2. Based on nominal pipe size with 5 feet (1.5 m) horizontal length, zero discharge head and 68°F (20°C) water temperature at sea level.
3. Based on an operating point at 50% of BEP capacity.
4. Without check valve or check valve partially open.

# Xylem |'zīləm|

- 1) The tissue in plants that brings water upward from the roots;
- 2) a leading global water technology company.

We're a global team unified in a common purpose: creating innovative solutions to meet our world's water needs. Developing new technologies that will improve the way water is used, conserved, and re-used in the future is central to our work. We move, treat, analyze, and return water to the environment, and we help people use water efficiently, in their homes, buildings, factories and farms. In more than 150 countries, we have strong, long-standing relationships with customers who know us for our powerful combination of leading product brands and applications expertise, backed by a legacy of innovation.

**For more information on how Xylem can help you, go to [www.xyleminc.com](http://www.xyleminc.com)**



Xylem Inc.  
2881 East Bayard Street Ext., Suite A  
Seneca Falls, NY 13148  
Phone: (800) 453-6777  
Fax: (888) 322-5877  
[www.gouldswatertechnology.com](http://www.gouldswatertechnology.com)

Goulds is a registered trademark of Goulds Pumps, Inc. and is used under license.  
© 2016 Xylem Inc. BPRIMELINE R2 June 2016